# **Product datasheet**

Specification





variable speed drive, Easy Altivar 310, 5.5kW, 7.5hp, 380 to 460V, 3 phase, without filter

ATV310HU55N4E

## Main

Range Of Product	Easy Altivar 310					
Product Or Component Type	Variable speed drive					
Product Specific Application	Simple machine					
Assembly Style	With heat sink					
Device Short Name	ATV310					
Network Number Of Phases	Three phase					
[Us] Rated Supply Voltage	380460 V - 1510 %					
Motor Power Kw	5.5 kW for heavy duty 7.5 kW for normal duty					
Motor Power Hp	7.5 hp for heavy duty 10 hp for normal duty					
Noise Level	50 dB					

## Complementary

Quantity Per Set	Set of 1					
Emc Filter	Without EMC filter					
Type Of Cooling	Integrated fan					
Communication Port Protocol	Modbus					
Connector Type	RJ45 (on front face) for Modbus					
Physical Interface	2-wire RS 485 for Modbus					
Transmission Frame	RTU for Modbus					
Transmission Rate	4800 bit/s 9600 bit/s 19200 bit/s 38400 bit/s					
Number Of Addresses	1247 for Modbus					
Communication Service	Read holding registers (03) 29 words Write single register (06) 29 words Write multiple registers (16) 27 words Read/write multiple registers (23) 4/4 words Read device identification (43)					
Line Current	21.3 A at 380 V (heavy duty) 23.0 A at 380 V (normal duty) 14.3 A at 460 V (heavy duty) 19.0 A at 460 V (normal duty)					
Apparent Power	11.4 kVA at 460 V (heavy duty) 15.1 kVA at 460 V (normal duty)					

Prospective Line Isc	22 kA ( heavy duty ) 5 kA ( normal duty )								
Continuous Output Current	12.6 A heavy duty 16.0 A normal duty								
Maximum Transient Current	18.9 A during 60 s (heavy duty) 17.6 A during 60 s (normal duty)								
Power Dissipation In W	162.4 W, at In (heavy duty) 201.9 W, at In (normal duty)								
Speed Drive Output Frequency	0.5400 Hz								
Nominal Switching Frequency	4 kHz								
Switching Frequency	212 kHz adjustable								
Speed Range	120 for asynchronous motor								
Transient Overtorque	170200 % of nominal motor torque depending on drive rating and type of motor								
Braking Torque	Up to 150 % of nominal motor torque with braking resistor Up to 70 % of nominal motor torque without braking resistor								
Asynchronous Motor Control Profile	Voltage/frequency ratio (V/f) Voltage/frequency ratio - Energy Saving, quadratic U/f Sensorless vector control (SVC)								
Motor Slip Compensation	Adjustable								
Output Voltage	380460 V three phase								
Electrical Connection	Terminal, clamping capacity: 4 mm², AWG 12 (L1, L2, L3, PA/+, PB, U, V, W)								
Tightening Torque	1.21.4 N.m								
Insulation	Electrical between power and control								
Supply	Internal supply for reference potentiometer: 5 V (4.755.25 V)DC, <10 mA with overload and short-circuit protection Internal supply for logic inputs: 24 V (20.428.8 V)DC, <100 mA with overload and short-circuit protection								
Analogue Input Number	1								
Analogue Input Type	Configurable current Al1 020 mA 250 Ohm Configurable voltage Al1 010 V 30 kOhm Configurable voltage Al1 05 V 30 kOhm								
Discrete Input Number	4								
Discrete Input Type	Programmable LI1LI4 24 V 1830 V								
Discrete Input Logic	Negative logic (sink), > 16 V (state 0), < 10 V (state 1), input impedance 3.5 kOhm Positive logic (source), 0< 5 V (state 0), > 11 V (state 1)								
Sampling Duration	10 ms for analogue input 20 ms, tolerance +/- 1 ms for logic input								
Linearity Error	+/- 0.3 % of maximum value for analogue input								
Analogue Output Number	1								
Analogue Output Type	AO1 software-configurable voltage: 010 V AC 010 V 00.02 A, impedance: 470 Ohm, resolution 8 bits AO1 software-configurable current: 020 mA, impedance: 800 Ohm, resolution 8 bits								
Discrete Output Number	2								
Discrete Output Type	Logic output LO+, LO- Protected relay output R1A, R1B, R1C 1 C/O								
Minimum Switching Current	5 mA at 24 V DC for logic relay								
Maximum Switching Current	2 A at 250 V AC on inductive load cos phi = 0.4 L/R = 7 ms for logic relay 2 A at 30 V DC on inductive load cos phi = 0.4 L/R = 7 ms for logic relay 3 A at 250 V AC on resistive load cos phi = 1 L/R = 0 ms for logic relay 4 A at 30 V DC on resistive load cos phi = 1 L/R = 0 ms for logic relay								

Acceleration And Deceleration Ramps	Linear from 0999.9 s S U				
Braking To Standstill	By DC injection, <30 s				
Protection Type	Line supply overvoltage Line supply undervoltage Overcurrent between output phases and earth Overheating protection Short-circuit between motor phases Against input phase loss in three-phase Thermal motor protection via the drive by continuous calculation of I²t				
Frequency Resolution	Analog input: converter A/D, 10 bits Display unit: 0.1 Hz				
Time Constant	20 ms +/- 1 ms for reference change				
Operating Position	Vertical +/- 10 degree				
Height	184 mm				
Width	140 mm				
Depth	151 mm				
Net Weight 1.8 kg					
Supply Frequency	50/60 Hz +/- 5 %				
Product Destination	Asynchronous motors				

## **Environment**

Electromagnetic Compatibility	Electrical fast transient/burst immunity test - test level: level 4 conforming to IEC 61000-4-4 Electrostatic discharge immunity test - test level: level 3 conforming to IEC 61000-4-2						
	Immunity to conducted disturbances - test level: level 3 conforming to IEC 61000-4-6 Radiated radio-frequency electromagnetic field immunity test - test level: level 3 conforming to IEC 61000-4-3						
	Voltage dips and interruptions immunity test conforming to IEC 61000-4-11						
	Surge immunity test - test level: level 3 conforming to IEC 61000-4-5						
Standards	IEC 61800-3						
Product Certifications	CE						
	EAC						
	KC						
Ip Degree Of Protection	IP20 without blanking plate on upper part						
	IP4X top						
Pollution Degree	2 conforming to IEC 61800-5-1						
Environmental Characteristic	Dust pollution resistance class 3S2 conforming to IEC 60721-3-3						
	Chemical pollution resistance class 3C3 conforming to IEC 60721-3-3						
Shock Resistance	15 gn conforming to IEC 60068-2-27 for 11 ms						
Relative Humidity	595 % without condensation conforming to IEC 60068-2-3						
	595 % without dripping water conforming to IEC 60068-2-3						
Ambient Air Temperature For Storage	-2570 °C						
Ambient Air Temperature For	-1055 °C without derating						
Operation	$5560~^{\circ}\text{C}$ protective cover from the top of the drive removed with current derating $2.2~\%$ per $^{\circ}\text{C}$						
Operating Altitude	<= 1000 m without derating						

# **Packing Units**

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1

Package 1 Height	18.800 cm
Package 1 Width	18.290 cm
Package 1 Length	22.860 cm
Package 1 Weight	2.280 kg
Unit Type Of Package 2	S03
Number Of Units In Package 2	2
Package 2 Height	30.000 cm
Package 2 Width	30.000 cm
Package 2 Length	40.000 cm
Package 2 Weight	5.060 kg



**Green Premium**<sup>TM</sup> **label** is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO<sub>2</sub> products.

**Guide to assessing product sustainability** is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >





Transparency RoHS/REACh

## Well-being performance



Mercury Free



Rohs Exemption Information

Yes


## **Certifications & Standards**


Reach Regulation	REACh Declaration
Eu Rohs Directive	Compliant with Exemptions
China Rohs Regulation	China RoHS declaration
Environmental Disclosure	Product Environmental Profile
Weee	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins
Circularity Profile	End of Life Information

## ATV310HU55N4E

## **Dimensions Drawings**

#### **Dimensions**





Dimensions in mm

а	b	С	G	Н	H1	Ø	For screws
140	171	151	126	157	184	5	M4

Dimensions in in.


а	b	С	G	Н	H1	Ø	For screws
5.51	6.73	5.94	4.96	6.18	7.24	0.20	M4

## ATV310HU55N4E

## Mounting and Clearance


#### **Mounting Recommendations**

#### Clearance

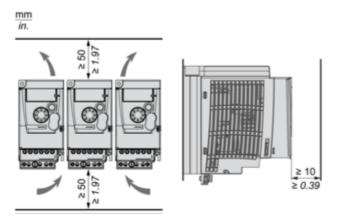


## **Mounting Types**

Mounting Type A




#### Mounting Type B



Remove the protective cover from the top of the drive.

#### Connections and Schema

#### **Three-Phase Power Supply Wiring Diagram**

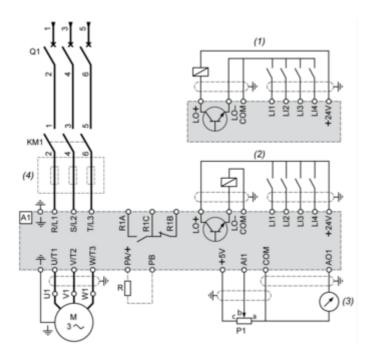

A1: Drive

KM1 : Contactor (only if a control circuit is needed)

**P1**: 2.2 k $\Omega$  reference potentiometer. This can be replaced by a 10 k $\Omega$  potentiometer (maximum).

Q1 : Circuit breaker

R: Braking resistor (optional)

(1) Negative logic (Sink)

(2) Positive logic (Source) (factory set configuration)

(3) 0...10 V or 0...20 mA

(4) Line choke three-phase (optional)