

# Product datasheet

Specifications



## variable speed drive ATV12 - 0.75kW - 1hp - 200..240V - 3ph - on base plate

Local distributor code: 392951760    ATV12P075M3

### Main

Product destination	Asynchronous motors
Component name	ATV12
Built-in fan	Without
Network number of phases	3 phases
Motor power kW	0.75 kW
Motor power hp	1 hp
Line current	6.3 A at 200 V 5.3 A at 240 V
Speed range	1...20
IP degree of protection	IP20 without blanking plate on upper part
Range of product	Altivar 12
Product or component type	Variable speed drive
Product specific application	Simple machine
Communication port protocol	Modbus
[Us] rated supply voltage	200...240 V - 15...10 %
EMC filter	Without EMC filter

### Complementary

Supply frequency	50/60 Hz +/- 5 %
Connector type	1 RJ45 (on front face) for Modbus
Physical interface	2-wire RS 485 for Modbus
Transmission frame	RTU for Modbus
Transmission rate	4800 bit/s 9600 bit/s 19200 bit/s 38400 bit/s
Number of addresses	1...247 for Modbus
Communication service	Read holding registers (03) 29 words Write single register (06) 29 words Write multiple registers (16) 27 words Read/write multiple registers (23) 4/4 words Read device identification (43)
Continuous output current	4.2 A at 4 kHz

<b>Maximum transient current</b>	6.3 A for 60 s
<b>Speed drive output frequency</b>	0.5...400 Hz
<b>Braking torque</b>	Up to 70 % of nominal motor torque without braking resistor
<b>Output voltage</b>	200...240 V 3 phases
<b>Electrical connection</b>	Terminal, clamping capacity: 3.5 mm <sup>2</sup> , AWG 12 (L1, L2, L3, U, V, W, PA, PC)
<b>Tightening torque</b>	0.8 N.m
<b>Insulation</b>	Electrical between power and control
<b>Supply</b>	Internal supply for reference potentiometer: 5 V DC (4.75...5.25 V), <10 mA, protection type: overload and short-circuit protection Internal supply for logic inputs: 24 V DC (20.4...28.8 V), <100 mA, protection type: overload and short-circuit protection
<b>Analogue input type</b>	Configurable current AI1 0...20 mA 250 Ohm Configurable voltage AI1 0...10 V 30 kOhm Configurable voltage AI1 0...5 V 30 kOhm
<b>Discrete input type</b>	Programmable LI1...LI4 24 V 18...30 V
<b>Discrete input logic</b>	Negative logic (sink), > 16 V (state 0), < 10 V (state 1), input impedance 3.5 kOhm Positive logic (source), 0...< 5 V (state 0), > 11 V (state 1)
<b>Sampling duration</b>	20 ms, tolerance +/- 1 ms for logic input 10 ms for analogue input
<b>Linearity error</b>	+/- 0.3 % of maximum value for analogue input
<b>Analogue output type</b>	AO1 software-configurable voltage: 0...10 V, impedance: 470 Ohm, resolution 8 bits AO1 software-configurable current: 0...20 mA, impedance: 800 Ohm, resolution 8 bits
<b>Discrete output type</b>	Logic output LO+, LO- Protected relay output R1A, R1B, R1C 1 C/O
<b>Minimum switching current</b>	5 mA at 24 V DC for logic relay
<b>Maximum switching current</b>	2 A 250 V AC inductive cos phi = 0.4 L/R = 7 ms logic relay 2 A 30 V DC inductive cos phi = 0.4 L/R = 7 ms logic relay 3 A 250 V AC resistive cos phi = 1 L/R = 0 ms logic relay 4 A 30 V DC resistive cos phi = 1 L/R = 0 ms logic relay
<b>Braking to standstill</b>	By DC injection, <30 s
<b>Frequency resolution</b>	Analog input: converter A/D, 10 bits Display unit: 0.1 Hz
<b>Time constant</b>	20 ms +/- 1 ms for reference change
<b>Variable speed drive application selection</b>	Mixer Commercial equipment Other application Commercial equipment Ironing Textile
<b>Motor starter type</b>	Variable speed drive
<b>Discrete input number</b>	4
<b>Discrete output number</b>	2
<b>Analogue input number</b>	1
<b>Analogue output number</b>	1
<b>Asynchronous motor control profile</b>	Voltage/frequency ratio (V/f) Quadratic voltage/frequency ratio Sensorless flux vector control
<b>Transient overtorque</b>	150...170 % of nominal motor torque depending on drive rating and type of motor
<b>Acceleration and deceleration ramps</b>	Linear from 0 to 999.9 s S U
<b>Motor slip compensation</b>	Preset in factory Adjustable
<b>Switching frequency</b>	2...16 kHz adjustable 4...16 kHz with derating factor
<b>Nominal switching frequency</b>	4 kHz
<b>Prospective line I<sub>sc</sub></b>	5 kA
<b>Protection type</b>	Line supply overvoltage

Line supply undervoltage  
 Overcurrent between output phases and earth  
 Overheating protection  
 Short-circuit between motor phases  
 Against input phase loss in three-phase  
 Thermal motor protection via the drive by continuous calculation of I<sup>2</sup>t

<b>Quantity per set</b>	Set of 1
<b>Width</b>	72 mm
<b>Height</b>	143 mm
<b>Depth</b>	102.2 mm
<b>Net weight</b>	0.7 kg

## Environment

<b>Electromagnetic emission</b>	Radiated emissions environment 1 category C2 conforming to EN/IEC 61800-3 2...16 kHz shielded motor cable Conducted emissions with additional EMC filter environment 1 category C2 conforming to EN/IEC 61800-3 4...12 kHz shielded motor cable <20 m Conducted emissions with additional EMC filter environment 2 category C3 conforming to EN/IEC 61800-3 4...12 kHz shielded motor cable <20 m
<b>Vibration resistance</b>	1 gn (f = 13...200 Hz) conforming to EN/IEC 60068-2-6 1.5 mm peak to peak (f = 3...13 Hz) - drive unmounted on symmetrical DIN rail - conforming to EN/IEC 60068-2-6
<b>Shock resistance</b>	15 gn conforming to EN/IEC 60068-2-27 for 11 ms
<b>Relative humidity</b>	5...95 % without condensation conforming to IEC 60068-2-3 5...95 % without dripping water conforming to IEC 60068-2-3
<b>Ambient air temperature for operation</b>	-10...40 °C protective cover from the top of the drive removed 40...60 °C with current derating 2.2 % per °C
<b>Operating altitude</b>	<= 1000 m without derating > 1000...3000 m with current derating 1 % per 100 m
<b>Operating position</b>	Vertical +/- 10 degree
<b>Product certifications</b>	GOST NOM C-Tick CSA UL
<b>Marking</b>	CE
<b>Assembly style</b>	On base plate
<b>Electromagnetic compatibility</b>	Electrical fast transient/burst immunity test level 4 conforming to EN/IEC 61000-4-4 Electrostatic discharge immunity test level 3 conforming to EN/IEC 61000-4-2 Immunity to conducted disturbances level 3 conforming to EN/IEC 61000-4-6 Radiated radio-frequency electromagnetic field immunity test level 3 conforming to EN/IEC 61000-4-3 Surge immunity test level 3 conforming to EN/IEC 61000-4-5 Voltage dips and interruptions immunity test conforming to EN/IEC 61000-4-11
<b>Noise level</b>	0 dB
<b>Ambient air temperature for storage</b>	-25...70 °C

## Packing Units

<b>Unit Type of Package 1</b>	PCE
<b>Number of Units in Package 1</b>	1
<b>Package 1 Weight</b>	1.05 kg
<b>Package 1 Height</b>	11.5 cm
<b>Package 1 width</b>	18.7 cm
<b>Package 1 Length</b>	18.7 cm
<b>Unit Type of Package 2</b>	P06
<b>Number of Units in Package 2</b>	45
<b>Package 2 Weight</b>	60.25 kg

Package 2 Height	73.5 cm
Package 2 width	60 cm
Package 2 Length	80 cm

## Offer Sustainability


Sustainable offer status	Green Premium product
REACH Regulation	<a href="#">REACH Declaration</a>
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) <a href="#">EU RoHS Declaration</a>
Mercury free	Yes
RoHS exemption information	<a href="#">Yes</a>
China RoHS Regulation	<a href="#">China RoHS declaration</a>
Environmental Disclosure	<a href="#">Product Environmental Profile</a>
Circularity Profile	<a href="#">End of Life Information</a>
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

## Contractual warranty


Warranty	18 months
----------	-----------

Dimensions

Drive without EMC Conformity Kit

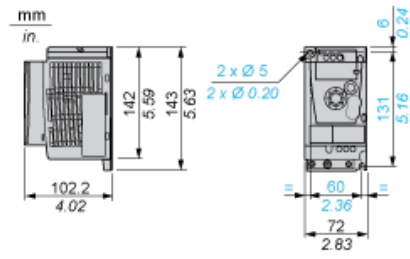


Drive with EMC Conformity Kit

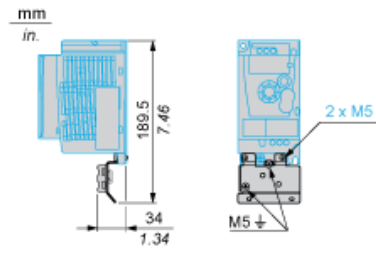


**Mounting Recommendations**


**Clearance for Vertical Mounting**

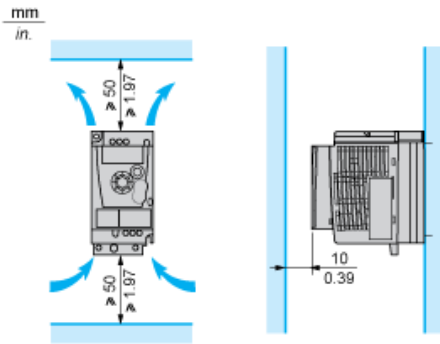

**Mounting Type A**

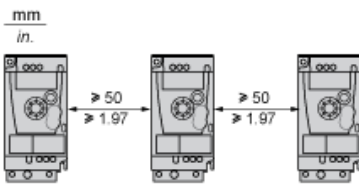


**Mounting Type B**



Remove the protective cover from the top of the drive.


**Mounting Type C**

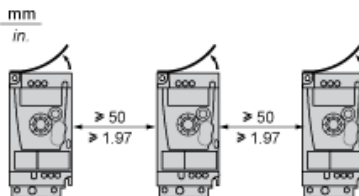

Remove the protective cover from the top of the drive.

**Three-Phase Power Supply Wiring Diagram**


---

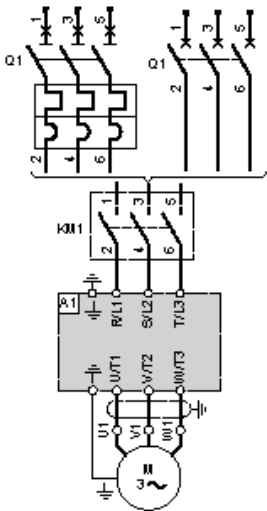

- A1** Drive
- KM1** Contactor (only if a control circuit is needed)
- Q1** Circuit breaker


**Recommended Schemes**

**2-Wire Control for Logic I/O with Internal Power Supply**




LI1 : Forward  
LIe : Reverse  
A1 : Drive

**3-Wire Control for Logic I/O with Internal Power Supply**




LI1 : Stop  
LI2 : Forward  
LIe : Reverse  
A1 : Drive

**Analog Input Configured for Voltage with Internal Power Supply**




(1) 2.2 kΩ...10 kΩ reference potentiometer  
A1 : Drive

**Analog Input Configured for Current with Internal Power Supply**




(2) 0-20 mA 4-20 mA supply  
A1 : Drive

**Connected as Positive Logic (Source) with External 24 vdc Supply**

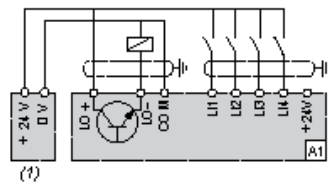

(1) 24 vdc supply  
A1 : Drive


**Connected as Negative Logic (Sink) with External 24 vdc supply**

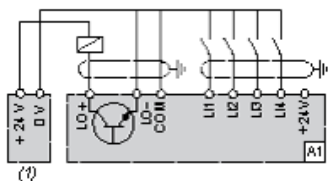

(1) 24 vdc supply  
A1 : Drive



Torque Curves

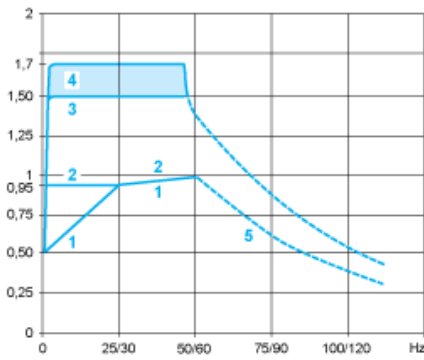

- 1 : Self-cooled motor: continuous useful torque (1)
- 2 : Force-cooled motor: continuous useful torque
- 3 : Transient overtorque for 60 s
- 4 : Transient overtorque for 2 s
- 5 : Torque in overspeed at constant power (2)
- (1) For power ratings  $\leq 250$  W, derating is 20% instead of 50% at very low frequencies.
- (2) The nominal motor frequency and the maximum output frequency can be adjusted from 0.5 to 400 Hz. The mechanical overspeed capability of the