



Preventa module Cat.4 features 2*XPSUAF + enabling movement 24vac/dc spring

XPSUS12AC

EAN Code: 3606489601805

Main

Panga Of Product	Hamana Orfota Automotiva		
Range Of Product	Harmony Safety Automation		
Product Or Component Type	Safety module XPSUS		
Safety Module Name			
Safety Module Application	For electrical monitoring of two-hand control stations		
	Monitoring antivalent contacts		
	For emergency stop, guard and light curtain monitoring		
	For enabling switch monitoring		
Function Of Module	Emergency stop button with 2 NC contacts		
	Guard monitoring with 1 or 2 limit switches		
	Monitoring 2 PNP sensors		
	Magnetic switch monitoring		
	Light curtain monitoring		
	RFID switch		
	Monitoring of electro-sensitive protection equipment (ESPE)		
	Enabling switch monitoring		
	Proximity sensor monitoring		
	Monitoring two-hand control station		
Safety Level	Can reach PL e/category 4 conforming to ISO 13849-1		
	Can reach SILCL 3 conforming to IEC 62061		
	Can reach SIL 3 conforming to IEC 61508		
Safety Reliability Data	MTTFd > 30 years conforming to ISO 13849-1		
	Dcavg >= 99 % conforming to ISO 13849-1		
	PFHd = 1.13E-09 conforming to ISO 13849-1		
	HFT = 1 conforming to IEC 62061		
	PFHd = 1.13E-09 conforming to IEC 62061		
	SFF > 99% conforming to IEC 62061		
	HFT = 1 conforming to IEC 61508-1		
	PFHd = 1.13E-09 conforming to IEC 61508-1		
	SFF > 99% conforming to IEC 61508-1		
	Type = B conforming to IEC 61508-1		
Electrical Circuit Type	NC pair		
	PNP pair		
	Antivalent pair		
	OSSD pair		
Connections - Terminals	Removable spring terminal block, 0.22.5 mm² solid or flexible		
	Removable spring terminal block, 0.252.5 mm² flexible with ferrule single conductor		
	Removable spring terminal block, 0.21.5 mm² solid or flexible twin conductor		
	Removable spring terminal block, 2 x 0.251 mm² flexible with ferrule without cable		
	end, with bezel		
	Removable spring terminal block, 2 x 0.51.5 mm² flexible with ferrule with cable		
	end, with bezel		
[Us] Rated Supply Voltage	24 V AC - 1510 %		
, 3	24 V DC - 2020 %		

Complementary

Synchronisation Time Between Inputs

0.5 s

2 s

4 s

Type Of Start	Automatic/manual/monitored			
Power Consumption In W	2 W 24 V DC			
Power Consumption In Va	5.0 VA 24 V AC 50/60 Hz			
Input Protection Type	Internal, electronic			
Safety Outputs	2 NO			
Safety Inputs	2 safety input 24 V DC 5 mA			
Maximum Wire Resistance	500 Ohm			
Input Compatibility	Normally closed circuit conforming to ISO 14119 XC limit switch conforming to ISO 14119 Mechanical contact conforming to ISO 14119 Normally closed circuit conforming to ISO 13850 Antivalent pair conforming to ISO 14119 OSSD pair conforming to IEC 61496-1-2 Two-hand control conforming to EN 574/ISO 13851-III A Two-hand control conforming to EN 574/ISO 13851-III C 3-wire proximity sensors PNP			
[le] Rated Operational Current	5 A AC-1 for normally open relay contact 3 A AC-15 for normally open relay contact 5 A DC-1 for normally open relay contact 3 A DC-13 for normally open relay contact 3 A AC-1 for normally closed relay contact 1 A AC-15 for normally closed relay contact 3 A DC-1 for normally closed relay contact 1 A DC-13 for normally closed relay contact			
Control Outputs	3 on/off configurable pulsed output			
Input/Output Type	Semiconductor pulsed diagnostic output 24 V DC, 20 mA Z1, not safety-related			
Input/Output Type [Ith] Conventional Free Air Thermal Current	Semiconductor pulsed diagnostic output 24 V DC, 20 mA Z1, not safety-related 8 A			
[Ith] Conventional Free Air				
[Ith] Conventional Free Air Thermal Current	8 A			
[Ith] Conventional Free Air Thermal Current Associated Fuse Rating	8 A 10 A gG for NO relay output circuit conforming to IEC 60947-1			
[Ith] Conventional Free Air Thermal Current Associated Fuse Rating Minimum Output Current	8 A 10 A gG for NO relay output circuit conforming to IEC 60947-1 10 mA for relay output			
[Ith] Conventional Free Air Thermal Current Associated Fuse Rating Minimum Output Current Minimum Output Voltage Maximum Response Time On	8 A 10 A gG for NO relay output circuit conforming to IEC 60947-1 10 mA for relay output 12 V for relay output			
[Ith] Conventional Free Air Thermal Current Associated Fuse Rating Minimum Output Current Minimum Output Voltage Maximum Response Time On Input Open	8 A 10 A gG for NO relay output circuit conforming to IEC 60947-1 10 mA for relay output 12 V for relay output 20 ms			
[Ith] Conventional Free Air Thermal Current Associated Fuse Rating Minimum Output Current Minimum Output Voltage Maximum Response Time On Input Open [Ui] Rated Insulation Voltage [Uimp] Rated Impulse Withstand	8 A 10 A gG for NO relay output circuit conforming to IEC 60947-1 10 mA for relay output 12 V for relay output 20 ms 250 V (pollution degree 2) conforming to IEC 60947-1			
[Ith] Conventional Free Air Thermal Current Associated Fuse Rating Minimum Output Current Minimum Output Voltage Maximum Response Time On Input Open [Ui] Rated Insulation Voltage [Uimp] Rated Impulse Withstand Voltage	8 A 10 A gG for NO relay output circuit conforming to IEC 60947-1 10 mA for relay output 12 V for relay output 20 ms 250 V (pollution degree 2) conforming to IEC 60947-1 4 kV overvoltage category II conforming to IEC 60947-1 LED (green) for power ON LED (red) for error LED (yellow) for safety output status LED (yellow) for safety input S12 LED (yellow) for safety input S13 LED (yellow) for safety input S22			
[Ith] Conventional Free Air Thermal Current Associated Fuse Rating Minimum Output Current Minimum Output Voltage Maximum Response Time On Input Open [Ui] Rated Insulation Voltage [Uimp] Rated Impulse Withstand Voltage Local Signalling	8 A 10 A gG for NO relay output circuit conforming to IEC 60947-1 10 mA for relay output 12 V for relay output 20 ms 250 V (pollution degree 2) conforming to IEC 60947-1 4 kV overvoltage category II conforming to IEC 60947-1 LED (green) for power ON LED (red) for error LED (yellow) for safety output status LED (yellow) for safety input S12 LED (yellow) for safety input S13 LED (yellow) for safety input S22 LED (yellow) for safety input S23			
[Ith] Conventional Free Air Thermal Current Associated Fuse Rating Minimum Output Current Minimum Output Voltage Maximum Response Time On Input Open [Ui] Rated Insulation Voltage [Uimp] Rated Impulse Withstand Voltage Local Signalling	8 A 10 A gG for NO relay output circuit conforming to IEC 60947-1 10 mA for relay output 12 V for relay output 20 ms 250 V (pollution degree 2) conforming to IEC 60947-1 4 kV overvoltage category II conforming to IEC 60947-1 LED (green) for power ON LED (red) for error LED (yellow) for safety output status LED (yellow) for safety input S12 LED (yellow) for safety input S13 LED (yellow) for safety input S22 LED (yellow) for safety input S23 35 mm symmetrical DIN rail			
[Ith] Conventional Free Air Thermal Current Associated Fuse Rating Minimum Output Current Minimum Output Voltage Maximum Response Time On Input Open [Ui] Rated Insulation Voltage [Uimp] Rated Impulse Withstand Voltage Local Signalling Mounting Support Depth	8 A 10 A gG for NO relay output circuit conforming to IEC 60947-1 10 mA for relay output 12 V for relay output 20 ms 250 V (pollution degree 2) conforming to IEC 60947-1 4 kV overvoltage category II conforming to IEC 60947-1 LED (green) for power ON LED (red) for error LED (yellow) for safety output status LED (yellow) for safety input LED (yellow) for safety input S12 LED (yellow) for safety input S13 LED (yellow) for safety input S22 LED (yellow) for safety input S23 35 mm symmetrical DIN rail			

Environment

Standards	IEC 60947-5-1 IEC 61508-1 functional safety standard IEC 61508-2 functional safety standard IEC 61508-3 functional safety standard IEC 61508-4 functional safety standard IEC 61508-5 functional safety standard IEC 61508-6 functional safety standard IEC 61508-7 functional safety standard IEC 62061 functional safety standard IEC 62061 functional safety standard		
Product Certifications	TÜV cULus		
Ip Degree Of Protection	IP20 (terminals) conforming to IEC 60529 IP40 (housing) conforming to IEC 60529 IP54 (mounting area) conforming to IEC 60529		
Ambient Air Temperature For Storage	-2585 °C		
Relative Humidity	595 % non-condensing		

Packing Units

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	6.5 cm
Package 1 Width	13.5 cm
Package 1 Length	15.5 cm
Package 1 Weight	280.0 g
Unit Type Of Package 2	S03
Number Of Units In Package 2	16
Package 2 Height	30 cm
Package 2 Width	30 cm
Package 2 Length	40 cm
Package 2 Weight	5.225 kg

Contractual warranty

Warranty 18 months



Green PremiumTM label is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >





Transparency RoHS/REACh

Well-being performance

Ø	Mercury Free	
	Rohs Exemption Information	Yes
②	Pvc Free	

Certifications & Standards


Reach Regulation	REACh Declaration		
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope)		
China Rohs Regulation	China RoHS declaration		
Environmental Disclosure	Product Environmental Profile		
Weee	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins		
Circularity Profile	End of Life Information		

3 May 2024

Dimensions Drawings

Dimensions

Front and Side Views

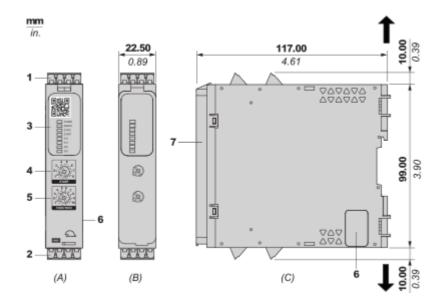


- (A): Product drawing
- (B): Spring Terminal
- (C) : Side view
- (1): Removable terminal blocks, top
- (2): Removable terminal blocks, bottom
- (3): LED indicators
- (4): Start function selector
- (5): Function selector
- (6): Connector for optional output extension module (lateral)
- (7): Sealable transparent cover

mm in.	0.47	\\ \\ \\ \\ \\ \\ \\ \\ \\ \\ \\ \\ \\	₩ ₩			
	mm²	0,22,5	0,252,5	0,21,5	0,251	0,51,5
	AWG	2412	2412	2416	2418	2016


Mounting and Clearance

Mounting to DIN rail

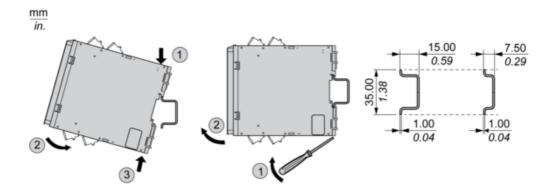


Screw-mounting



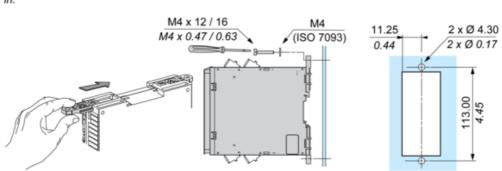

Connections and Schema

Wiring Drawing

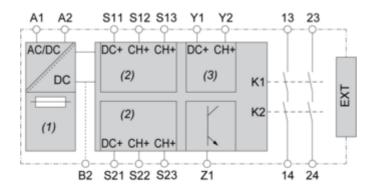

(1): A1-A2 (Power supply)

(2): S11-S12-S13-S21-S22-S23 (Single-channel safety input)

(3): Y1-Y2 (Start) 13-23-14-24: Output

EXT: Connector for optional extension module

B2: Common ground terminal

Z1: Pulsed output for diagnostics, not safety-related