# Product data sheet





## AC servo motor BSH, Lexium 05, 2.83N.m, 6000rpm, untapped shaft, without brake, IP65

BSH0703T21A1A

! Discontinued on: Jun 30, 2023

(!) Discontinued

Product availability: Non-Stock - Not normally stocked in distribution facility

#### Main

Product Or Component Type	Servo motor
Device Short Name	BSH
Maximum Mechanical Speed	8000 rpm
Continuous Stall Torque	24.78 lbf.in (2.8 N.m) LXM05AD28M2, 200240 V, single phase 24.78 lbf.in (2.8 N.m) LXM05BD28M2, 200240 V, single phase 24.78 lbf.in (2.8 N.m) LXM05CD28M2, 200240 V, single phase 23.01 lbf.in (2.6 N.m) LXM05CD28M2, 200240 V, single phase 23.01 lbf.in (2.6 N.m) LXM32.D18M2 6 A, 230 V, single phase 25.05 lbf.in (2.83 N.m) LXM15LD28M3, 230 V, three phase 24.78 lbf.in (2.8 N.m) LXM05AD28F1, 110120 V, single phase 24.78 lbf.in (2.8 N.m) LXM05AD42M3X, 200240 V, three phase 24.78 lbf.in (2.8 N.m) LXM05BD28F1, 110120 V, single phase 24.78 lbf.in (2.8 N.m) LXM05BD42M3X, 200240 V, three phase 24.78 lbf.in (2.8 N.m) LXM05CD28F1, 110120 V, single phase 24.78 lbf.in (2.8 N.m) LXM05CD28F1, 110120 V, single phase 24.78 lbf.in (2.8 N.m) LXM05CD42M3X, 200240 V, three phase
Peak Stall Torque	65.32 lbf.in (7.38 N.m) LXM05AD28F1, 110120 V, single phase 65.32 lbf.in (7.38 N.m) LXM05AD28M2, 200240 V, single phase 65.32 lbf.in (7.38 N.m) LXM05BD28F1, 110120 V, single phase 65.32 lbf.in (7.38 N.m) LXM05BD28M2, 200240 V, single phase 65.32 lbf.in (7.38 N.m) LXM05CD28F1, 110120 V, single phase 65.32 lbf.in (7.38 N.m) LXM05CD28M2, 200240 V, single phase 65.32 lbf.in (7.38 N.m) LXM05CD28M2, 200240 V, single phase 65.50 lbf.in (7.4 N.m) LXM05CD28M3, 230 V, single phase 65.32 lbf.in (7.38 N.m) LXM15LD28M3, 230 V, three phase 90.72 lbf.in (10.25 N.m) LXM05AD42M3X, 200240 V, three phase 90.72 lbf.in (10.25 N.m) LXM05BD42M3X, 200240 V, three phase 90.72 lbf.in (10.25 N.m) LXM05CD42M3X, 200240 V, three phase
Nominal Output Power	750 W LXM05AD28M2, 200240 V, single phase 750 W LXM05BD28M2, 200240 V, single phase 750 W LXM05CD28M2, 200240 V, single phase 750 W LXM05CD28M2, 200240 V, single phase 750 W LXM05AD28F1, 110120 V, single phase 750 W LXM05BD28F1, 110120 V, single phase 750 W LXM05CD28F1, 110120 V, single phase 900 W LXM32.D18M2 6 A, 230 V, single phase 1250 W LXM15LD28M3, 230 V, three phase 750 W LXM05AD42M3X, 200240 V, three phase 750 W LXM05BD42M3X, 200240 V, three phase 750 W LXM05CD42M3X, 200240 V, three phase
Nominal Torque	21.24 lbf.in (2.4 N.m) LXM05AD28M2, 200240 V, single phase 21.24 lbf.in (2.4 N.m) LXM05BD28M2, 200240 V, single phase 21.24 lbf.in (2.4 N.m) LXM05CD28M2, 200240 V, single phase 21.24 lbf.in (2.4 N.m) LXM05AD28F1, 110120 V, single phase 21.24 lbf.in (2.4 N.m) LXM05AD28F1, 110120 V, single phase 21.24 lbf.in (2.4 N.m) LXM05D28F1, 110120 V, single phase 21.24 lbf.in (2.4 N.m) LXM05CD28F1, 110120 V, single phase 18.59 lbf.in (2.1 N.m) LXM32.D18M2 6 A, 230 V, single phase 17.70 lbf.in (2 N.m) LXM15LD28M3, 230 V, three phase 21.24 lbf.in (2.4 N.m) LXM05AD42M3X, 200240 V, three phase 21.24 lbf.in (2.4 N.m) LXM05BD42M3X, 200240 V, three phase 21.24 lbf.in (2.4 N.m) LXM05BD42M3X, 200240 V, three phase 21.24 lbf.in (2.4 N.m) LXM05CD42M3X, 200240 V, three phase

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Nominal Speed	3000 rpm LXM05AD28M2, 200240 V, single phase						
	3000 rpm LXM05BD28M2, 200240 V, single phase						
	3000 rpm LXM05CD28M2, 200240 V, single phase						
	3000 rpm LXM05AD42M3X, 200240 V, three phase 3000 rpm LXM05BD42M3X, 200240 V, three phase						
	3000 rpm LXM05CD42M3X, 200240 V, three phase						
	3000 rpm LXM05AD28F1, 110120 V, single phase						
	3000 rpm LXM05BD28F1, 110120 V, single phase						
	3000 rpm LXM05CD28F1, 110120 V, single phase						
	4000 rpm LXM32.D18M2 6 A, 230 V, single phase 6000 rpm LXM15LD28M3, 230 V, three phase						
Product Compatibility	LVM0FAD29F4 440 - 420 V single phase						
1 Todact Compatibility	LXM05AD28F1 110120 V single phase LXM05AD28M2 200240 V single phase						
	LXM05BD28F1 110120 V single phase						
	LXM05BD28M2 200240 V single phase						
	LXM05CD28F1 110120 V single phase						
	LXM05CD28M2 200240 V single phase						
	LXM32.D18M2 230 V single phase LXM05AD42M3X 200240 V three phase						
	LXM05BD42M3X 200240 V three phase						
	LXM05CD42M3X 200240 V three phase						
	LXM15LD28M3 230 V three phase						
Shaft End	Untapped						
Ip Degree Of Protection	IP65 standard						
	IP67 with IP67 kit						
Speed Feedback Resolution	131072 points/turn						
Holding Brake	Without						
Mounting Support	International standard flange						
Electrical Connection	Straight connectors						
Complementary							
Complementary Range Compatibility	Lexium 05						
	Lexium 05 Lexium 15						
	Lexium 15						
Range Compatibility	Lexium 15 Lexium 32						
Range Compatibility  Supply Voltage Max	Lexium 15 Lexium 32 480 V						
Range Compatibility  Supply Voltage Max  Phase	Lexium 15 Lexium 32  480 V  Three phase						
Range Compatibility  Supply Voltage Max  Phase  Continuous Stall Current	Lexium 15 Lexium 32  480 V  Three phase  7 A						
Range Compatibility  Supply Voltage Max  Phase  Continuous Stall Current  Maximum Continuous Power	Lexium 15 Lexium 32  480 V  Three phase  7 A  1.7 W						
Range Compatibility  Supply Voltage Max  Phase  Continuous Stall Current  Maximum Continuous Power	Lexium 15 Lexium 32  480 V  Three phase  7 A  1.7 W  18 A LXM32.D18M2 30.9 A LXM15LD28M3 29.2 A LXM05AD28F1						
Range Compatibility  Supply Voltage Max  Phase  Continuous Stall Current  Maximum Continuous Power	Lexium 15 Lexium 32  480 V  Three phase  7 A  1.7 W  18 A LXM32.D18M2 30.9 A LXM15LD28M3 29.2 A LXM05AD28F1 29.2 A LXM05AD28M2						
Range Compatibility  Supply Voltage Max  Phase  Continuous Stall Current  Maximum Continuous Power	Lexium 15 Lexium 32  480 V  Three phase  7 A  1.7 W  18 A LXM32.D18M2 30.9 A LXM15LD28M3 29.2 A LXM05AD28F1 29.2 A LXM05AD28M2 29.2 A LXM05AD42M3X						
Range Compatibility  Supply Voltage Max  Phase  Continuous Stall Current  Maximum Continuous Power	Lexium 15 Lexium 32  480 V  Three phase  7 A  1.7 W  18 A LXM32.D18M2 30.9 A LXM15LD28M3 29.2 A LXM05AD28F1 29.2 A LXM05AD28M2						
Range Compatibility  Supply Voltage Max  Phase  Continuous Stall Current  Maximum Continuous Power	Lexium 15 Lexium 32  480 V  Three phase  7 A  1.7 W  18 A LXM32.D18M2 30.9 A LXM15LD28M3 29.2 A LXM05AD28F1 29.2 A LXM05AD28M2 29.2 A LXM05AD42M3X 29.2 A LXM05AD28F1						
Range Compatibility  Supply Voltage Max  Phase  Continuous Stall Current  Maximum Continuous Power	Lexium 15 Lexium 32  480 V  Three phase  7 A  1.7 W  18 A LXM32.D18M2 30.9 A LXM15LD28M3 29.2 A LXM05AD28F1 29.2 A LXM05AD28M2 29.2 A LXM05AD28M2 29.2 A LXM05BD28F1 29.2 A LXM05BD28F1 29.2 A LXM05BD28F1 29.2 A LXM05BD28F1 29.2 A LXM05BD28M2 29.2 A LXM05BD28M2 29.2 A LXM05BD28M2 29.2 A LXM05BD28M2 29.2 A LXM05BD42M3X 29.2 A LXM05BD42M3X 29.2 A LXM05BD42M3X						
Range Compatibility  Supply Voltage Max  Phase  Continuous Stall Current  Maximum Continuous Power	Lexium 15 Lexium 32  480 V  Three phase  7 A  1.7 W  18 A LXM32.D18M2 30.9 A LXM15LD28M3 29.2 A LXM05AD28F1 29.2 A LXM05AD28M2 29.2 A LXM05AD28F1 29.2 A LXM05AD28F1 29.2 A LXM05BD28F1 29.2 A LXM05BD28F1 29.2 A LXM05BD28F1 29.2 A LXM05BD28M2 29.2 A LXM05BD28M2 29.2 A LXM05BD28M2 29.2 A LXM05BD28M2 29.2 A LXM05CD28F1 29.2 A LXM05CD28M2						
Range Compatibility  Supply Voltage Max  Phase  Continuous Stall Current  Maximum Continuous Power  Maximum Current Irms	Lexium 15 Lexium 32  480 V  Three phase  7 A  1.7 W  18 A LXM32.D18M2 30.9 A LXM15LD28M3 29.2 A LXM05AD28F1 29.2 A LXM05AD28M2 29.2 A LXM05AD28M2 29.2 A LXM05BD28F1 29.2 A LXM05BD28F1 29.2 A LXM05BD28F1 29.2 A LXM05BD28F1 29.2 A LXM05BD28M2 29.2 A LXM05BD28M2 29.2 A LXM05BD28M2 29.2 A LXM05BD28M2 29.2 A LXM05BD42M3X 29.2 A LXM05BD42M3X 29.2 A LXM05BD42M3X						
Range Compatibility  Supply Voltage Max  Phase  Continuous Stall Current  Maximum Continuous Power  Maximum Current Irms	Lexium 15 Lexium 32  480 V  Three phase  7 A  1.7 W  18 A LXM32.D18M2 30.9 A LXM15LD28M3 29.2 A LXM05AD28F1 29.2 A LXM05AD28M2 29.2 A LXM05AD28F1 29.2 A LXM05AD28F1 29.2 A LXM05BD28F1 29.2 A LXM05BD28F1 29.2 A LXM05BD28F1 29.2 A LXM05BD28M2 29.2 A LXM05BD28M2 29.2 A LXM05BD28M2 29.2 A LXM05BD28M2 29.2 A LXM05CD28F1 29.2 A LXM05CD28M2						
Range Compatibility  Supply Voltage Max  Phase  Continuous Stall Current  Maximum Continuous Power  Maximum Current Irms	Lexium 15 Lexium 32  480 V  Three phase  7 A  1.7 W  18 A LXM32.D18M2 30.9 A LXM15LD28M3 29.2 A LXM05AD28F1 29.2 A LXM05AD28F1 29.2 A LXM05AD28B1 29.2 A LXM05AD28B1 29.2 A LXM05BD28B1 29.2 A LXM05BD28F1 29.2 A LXM05BD28F1 29.2 A LXM05BD28M2 29.2 A LXM05BD28M2 29.2 A LXM05CD28F1 29.2 A LXM05CD28F1 29.2 A LXM05CD28M2						
Range Compatibility  Supply Voltage Max  Phase  Continuous Stall Current  Maximum Continuous Power  Maximum Current Irms	Lexium 15 Lexium 32  480 V  Three phase  7 A  1.7 W  18 A LXM32.D18M2 30.9 A LXM15LD28M3 29.2 A LXM05AD28F1 29.2 A LXM05AD28M2 29.2 A LXM05AD28F1 29.2 A LXM05AD28F1 29.2 A LXM05BD28F1 29.2 A LXM05BD28F1 29.2 A LXM05BD28M2 29.2 A LXM05BD42M3X 29.2 A LXM05BD42M3X 29.2 A LXM05CD28F1 29.2 A LXM05CD28M2 29.2 A LXM05CD42M3X 29.2 A LXM05CD42M3X						
Range Compatibility  Supply Voltage Max  Phase  Continuous Stall Current  Maximum Continuous Power  Maximum Current Irms  Maximum Permanent Current  Switching Frequency	Lexium 15 Lexium 32  480 V  Three phase  7 A  1.7 W  18 A LXM32.D18M2 30.9 A LXM15LD28M3 29.2 A LXM05AD28F1 29.2 A LXM05AD28M2 29.2 A LXM05AD28M2 29.2 A LXM05AD28F1 29.2 A LXM05BD28F1 29.2 A LXM05BD28F1 29.2 A LXM05BD28M2 29.2 A LXM05BD28M2 29.2 A LXM05BD42M3X 29.2 A LXM05BD42M3X 29.2 A LXM05CD28F1 29.2 A LXM05CD28F1 29.2 A LXM05CD42M3X 29.2 A LXM05CD42M3X						
Range Compatibility  Supply Voltage Max  Phase  Continuous Stall Current  Maximum Continuous Power  Maximum Current Irms  Maximum Permanent Current  Switching Frequency  Second Shaft	Lexium 15 Lexium 32  480 V  Three phase  7 A  1.7 W  18 A LXM32.D18M2 30.9 A LXM15LD28M3 29.2 A LXM05AD28F1 29.2 A LXM05AD28M2 29.2 A LXM05AD28M2 29.2 A LXM05BD28F1 29.2 A LXM05BD28F1 29.2 A LXM05BD28H1 29.2 A LXM05BD28M2 29.2 A LXM05BD28M2 29.2 A LXM05CD28M2 29.2 A LXM05CD28F1 29.2 A LXM05CD28M2 29.2 A LXM05CD28M2 29.2 A LXM05CD42M3X  29.2 A LXM05CD42M3X  29.2 A LXM05CD42M3X						
Range Compatibility  Supply Voltage Max  Phase  Continuous Stall Current  Maximum Continuous Power  Maximum Current Irms  Maximum Permanent Current  Switching Frequency  Second Shaft  Shaft Diameter	Lexium 15 Lexium 32  480 V  Three phase  7 A  1.7 W  18 A LXM32.D18M2 30.9 A LXM15LD28M3 29.2 A LXM05AD28F1 29.2 A LXM05AD28M2 29.2 A LXM05AD28M2 29.2 A LXM05AD28M2 29.2 A LXM05BD28F1 29.2 A LXM05BD28M2 29.2 A LXM05BD28M2 29.2 A LXM05BD28M2 29.2 A LXM05CD28F1 29.2 A LXM05CD28F1 29.2 A LXM05CD28M2 29.2 A LXM05CD42M3X						
Range Compatibility  Supply Voltage Max  Phase  Continuous Stall Current  Maximum Continuous Power  Maximum Current Irms  Maximum Permanent Current  Switching Frequency  Second Shaft  Shaft Diameter  Shaft Length	Lexium 15 Lexium 32  480 V  Three phase  7 A  1.7 W  18 A LXM32.D18M2 30.9 A LXM15LD28M3 29.2 A LXM05AD28H1 29.2 A LXM05AD28H2 29.2 A LXM05AD28H1 29.2 A LXM05BD28F1 29.2 A LXM05BD28H1 29.2 A LXM05BD28H2 29.2 A LXM05BD28M2 29.2 A LXM05CD28H1 29.2 A LXM05CD28H1 29.2 A LXM05CD28H2 29.2 A LXM05CD28M2 29.2 A LXM05CD4AM3X						

Torque Constant	0.44 N.m/A 248 °F (120 °C)
Back Emf Constant	29 V/krpm 248 °F (120 °C)
Number Of Motor Poles	6
Rotor Inertia	0.58 kg.cm²
Stator Resistance	0.91 Ohm 68 °F (20 °C)
Stator Inductance	4.4 mH 68 °F (20 °C)
Stator Electrical Time Constant	4.84 ms 68 °F (20 °C)
Maximum Radial Force Fr	400 N 6000 rpm 430 N 5000 rpm 460 N 4000 rpm 510 N 3000 rpm 580 N 2000 rpm 730 N 1000 rpm
Maximum Axial Force Fa	0.2 x Fr
Type Of Cooling	Natural convection
Length	8.66 in (220 mm)
Centring Collar Diameter	2.36 in (60 mm)
Centring Collar Depth	0.10 in (2.5 mm)
Number Of Mounting Holes	4
Mounting Holes Diameter	0.22 in (5.5 mm)
Circle Diameter Of The Mounting Holes	3.23 in (82 mm)
Net Weight	7.98 lb(US) (3.62 kg)

# Ordering and shipping details

Category	US1PC5318282						
Discount Schedule	PC53						
Gtin	3389118137608						
Returnability	No						
Country Of Origin	DE						

## **Packing Units**

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	4.84 in (12.3 cm)
Package 1 Width	5.04 in (12.8 cm)
Package 1 Length	14.84 in (37.7 cm)
Package 1 Weight	7.94 lb(US) (3.6 kg)

## **Contractual warranty**

## Sustainability Screen Premium

Green Premium<sup>TM</sup> label is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO2 products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >





Transparency RoHS/REACh

### Well-being performance



Narury Free



Rohs Exemption Information

Yes

### **Certifications & Standards**


Reach Regulation	REACh Declaration						
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope)						
China Rohs Regulation	China RoHS declaration						
Environmental Disclosure	Product Environmental Profile						
Weee	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.						
Circularity Profile	No need of specific recycling operations						
California Proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov						

### BSH0703T21A1A

#### **Dimensions Drawings**

#### **Servo Motors Dimensions**

#### **Example with Straight Connectors**

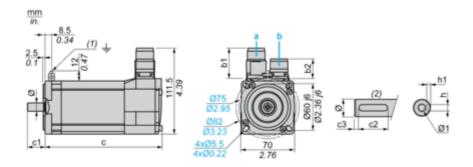

- a: Power supply for servo motor brake
- b: Power supply for servo motor encoder
- (1) M4 screw
- (2) Shaft end, keyed slot (optional)

#### Dimensions in mm

Straight Rotatable ar connectors connectors		•	c (without	c (with	c1	c2	сЗ	h	h1	Ø	Ø1 for	
b1	b2	b1	b2	brake)	brake)							screws
39.5	25.5	39.5	39.5	220	254	30	20	5	5 N9	3 <sup>+0.1</sup> 0	14 k6	M5 x 12.5

#### Dimensions in in.

Straight connectors Rotatable angled connectors			(without	c (with brake)	c1	c2	c3	h	h1	Ø	Ø1 for screws	
b1	b2	b1	b2	Diake)								
1.55	1.00	1.55	1.55	8.66	10.00	1.18	0.78	0.19	0.20 N9	0.12 <sup>+0.004</sup> 0	0.55 k6	M5 x 0.49

### **Product data sheet**


### BSH0703T21A1A

Performance Curves

### 230 V Single-Phase Supply Voltage

#### **Torque/Speed Curves**

Servo motor with LXM32•D18M2 servo drive



- X Speed in rpm
- Y Torque in Nm
- 1 Peak torque
- 2 Continuous torque