

Product data sheet

Specifications



Profibus DP V1 remote master - for Premium/Quantum/M340/M580 PLC - coated

TCSEGPA23F14FK

Product availability: Non-Stock - Not normally stocked in distribution facility

Main

Range Of Product	Profibus DP
Product Or Component Type	Profibus DP V1 remote master
Kit Composition	CD including the communication DTM CD including the Master DTM for PRM configuration inside UNITY
Communication Gateway	Ethernet Modbus TCP to Profibus DP V1 gateway
Product Compatibility	M580 PLC Premium PLC M340 PLC Quantum PLC
Structure Type	Industrial bus

Complementary

Physical Interface	RS485
Method Of Access	Master class 1 Profibus DP Master class 2 Profibus DP Slave Modbus TCP
Mode Of Transmission	NRZ
Transmission Support Medium	Profibus 2 twisted shielded pairs cable Modbus TCP category 5 shielded twisted pair (STP)
Transmission Rate	12 Mbit/s, 328.08 ft (100 m) Profibus without repeater 12 Mbit/s, 1312.34 ft (400 m) Profibus with 3 repeaters 9.6 kbit/s, 3937.01 ft (1200 m) Profibus without repeater 9.6 kbit/s, 15748.03 ft (4800 m) Profibus with 3 repeaters 10...100 Mbit/s, 328.08 ft (100 m) Modbus TCP without repeater
Number Of Server Device(S)	126
Number Of Inputs	2
Number Of Outputs	2
Communication Service	Check slave configuration (on power up) class 1 master Manage monitoring request (Global CONTROL and Get Master Diag) class 2 master No master/master dialogue class 2 master Profibus FMS message handling not supported class 1 master Profibus FMS message handling not supported class 2 master Read/write DP slave I/O data class 1 master Set slave parameters (on power up) class 1 master Transfer slave diagnostic data class 1 master Sync and freeze class 1 master Acyclic DP V1 communication (R/W) class 1/2 master
Integrated Connection Type	2 Ethernet TCP/IP - RJ45 Modbus TCP Profibus DP - SUB-D 9 Profibus DP V1
Current Consumption	200 mA 24 V DC external
Module Format	Standard

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Net Weight	1.37 lb(US) (0.62 kg)
------------	-----------------------

Environment

Ambient Air Temperature For Operation	-13...158 °F (-25...70 °C)
Ambient Air Temperature For Storage	-49...185 °F (-45...85 °C)
Relative Humidity	10...95 % without condensation
Operating Altitude	<= 6561.68 ft (2000 m)
Protective Treatment	Conformal coating Humiseal 1A33

Ordering and shipping details

Category	US1PC4118225
Discount Schedule	PC41
Gtin	3595864068817
Returnability	No
Country Of Origin	IE

Packing Units

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	2.24 in (5.700 cm)
Package 1 Width	7.05 in (17.900 cm)
Package 1 Length	10.35 in (26.300 cm)
Package 1 Weight	22.79 oz (646.000 g)
Unit Type Of Package 2	S03
Number Of Units In Package 2	8
Package 2 Height	11.81 in (30.000 cm)
Package 2 Width	11.81 in (30.000 cm)
Package 2 Length	15.75 in (40.000 cm)
Package 2 Weight	12.63 lb(US) (5.730 kg)

Contractual warranty

Warranty	18 months
----------	-----------

Sustainability

Green Premium™ label is Schneider Electric's commitment to delivering products with best-in-class environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

[Learn more about Green Premium >](#)

[Guide to assess a product's sustainability >](#)

Well-being performance



Mercury Free



Rohs Exemption Information

Yes

Eu Rohs Directive

Pro-active compliance (Product out of EU RoHS legal scope)

China Rohs Regulation

[China RoHS declaration](#)

Weee

The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.

California Proposition 65

WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

Mounting and Clearance


Module Mounting

At a glance

The PRM module can be installed either:




- With its support plate as a standalone module on a DIN rail, grid or panel
- Without its support plate as a Premium module inside the rack

Support Plate

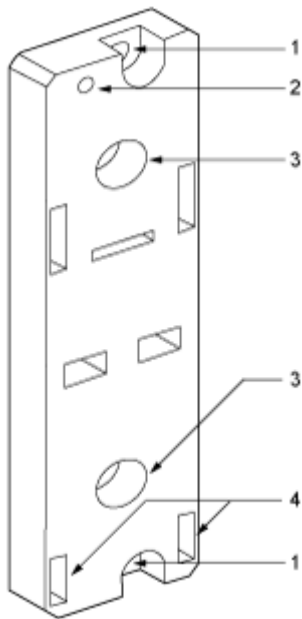

Label	Meaning
1	Two holes diameter 5.5 mm (7/32 in) allowing the support plate to be fixed to a panel or to an AM1-PA pre-slotted plate, with a center distance of 140 mm (5.51 in). Tightening torque: 1 to 1.2 N-m (8.8 to 10.6 lb-in).
2	M4 fixing hole for securing the PRM module.
3	Two holes diameter 6.5 mm (0.26 in) allowing the support plate to be fixed to a panel or to an AM1-PA pre-slotted plate with a center distance of 88.9 mm (3.5 in).
4	Slots for positioning the pins located at the bottom and rear of the module

Mounting on a DIN rail or Plate

Installation on Drilled plate	Installation on Din rail	Dimensions
		

Mounting Type		Dimensions			
		X		Y	
		mm	in.	mm	in.
Drilled Plate	(AM1-PA)			132.7	5.22
Din Rail	(AM1-DE200)	143.7	5.66		
Din Rail	(AM1-DP200)	136.2	5.36		

Mounting on a Premium Rack


Mechanically, the PRM is mounted like other Premium modules. The support plate must be removed before mounting in this case.

Electrically, the PRM doesn't use the rack connector for communication or for power supply. It must be powered by an external power supply.

To detach the module from its support plate, follow the steps below:


Step 1:

Unfasten the screw located in the top of the module to loosen it from its support.



Step 2:

Pivot the module forwards and disengage the pins from the holes located in the bottom of the support.



Refer to the Premium documentation for a description of the installation on the rack.