

Product data sheet

Specifications



empty pendant control station XAC-F - custom openings

XACF3250

 **Discontinued on:** Dec 19, 2019

 **Discontinued**

Main

Range Of Product	Harmony XAC
Product Or Component Type	Pendant control station
Device Short Name	XACF

Complementary

Control Station Type	Double insulated
Enclosure Material	Glass reinforced polyester
Electrical Circuit Type	Control circuit
Enclosure Type	Empty enclosure
Number Of Cut-Out	30 maximum in positions requested on the order form
Control Station Colour	Yellow
Cable Entry	Rubber sleeve with stepped entry 0.87...1.38 in (22...35 mm)
Guard Rail	Without
Standards	CSA C22.2 No 14
Protective Treatment	TH
Ambient Air Temperature For Operation	-13...158 °F (-25...70 °C)
Ambient Air Temperature For Storage	-40...158 °F (-40...70 °C)
Vibration Resistance	15 gn 10...500 Hz)IEC 60068-2-6
Shock Resistance	100 gn IEC 60068-2-27
Overvoltage Category	Class II IEC 61140
Ip Degree Of Protection	IP65 conforming to IEC 60529
Ik Degree Of Protection	IK08 conforming to EN 50102
Mechanical Durability	1000000 cycles
Net Weight	5.07 lb(US) (2.3 kg)

Ordering and shipping details

Category	18407-WORLD SERVICE PARTS(SENSORS)
Discount Schedule	T
Gtin	3389110891539
Returnability	No

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Contractual warranty


Warranty	18 months
----------	-----------

Product data sheet

XACF3250


Dimensions Drawings

Dimensions

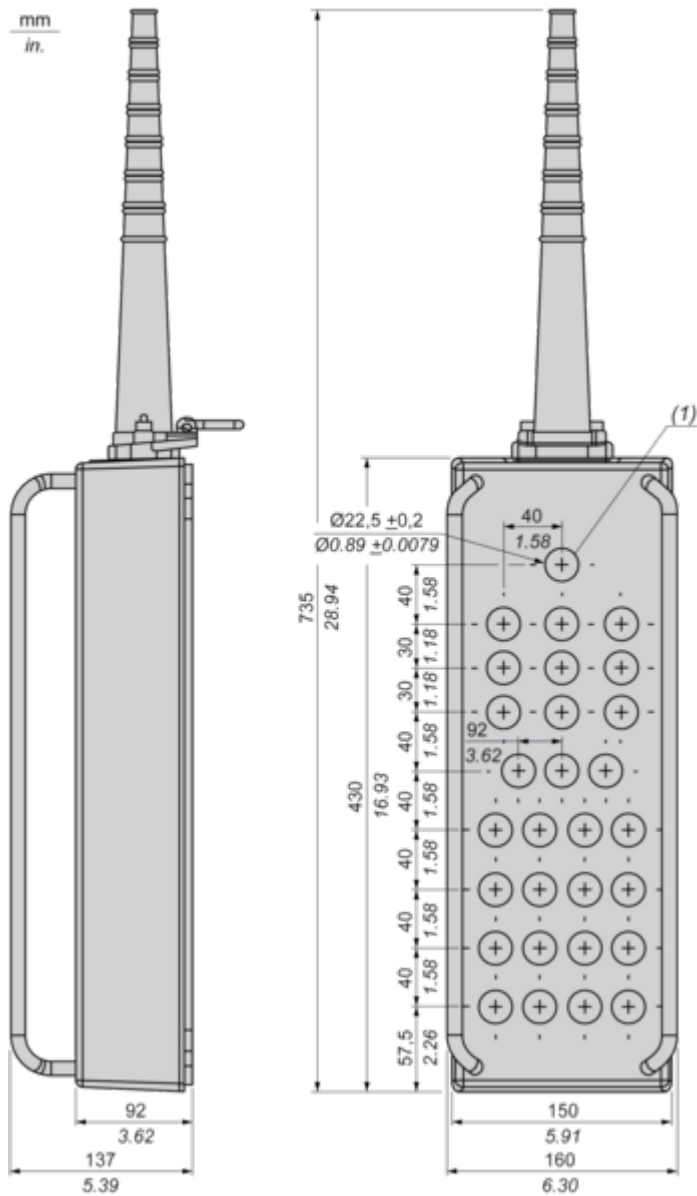


(1) Position Emergency STOP

Protective Cable Sleeves

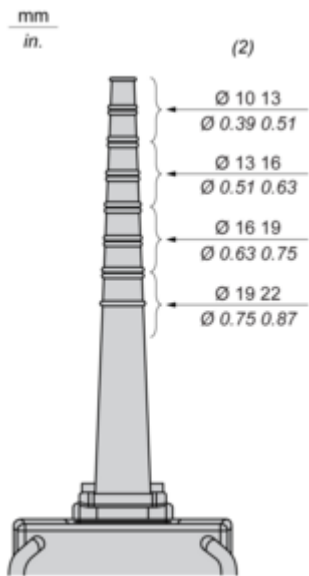

(2) Internal Ø (mm/in.)


Protective Cable Sleeves

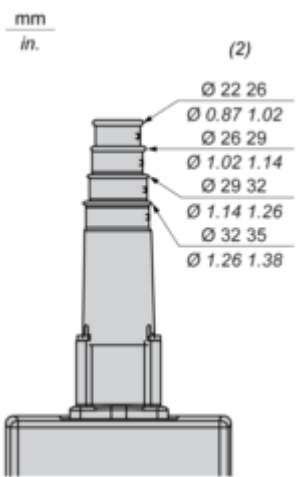

(2) Internal ø (mm/in.)

Mounting and Clearance

Mounting of Pendant Box

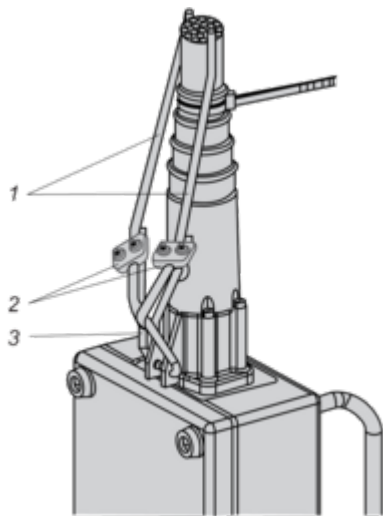


- 1 : Sustentation cables
- 2 : Cables clamp
- 3 : Ring

Connections and Schema


Control of Single-Speed Reversing Motor

With XESD1181 contact block, to be ordered separately

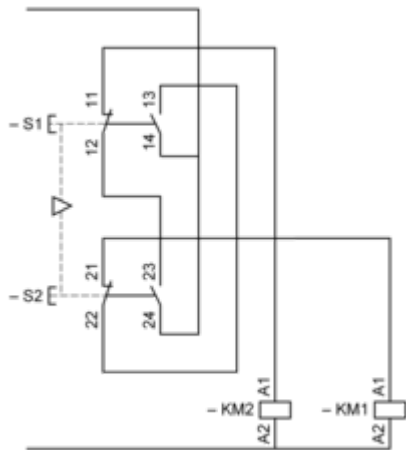

Control of 2-Speed Reversing Motor

With XESD1281 contact block, to be ordered separately

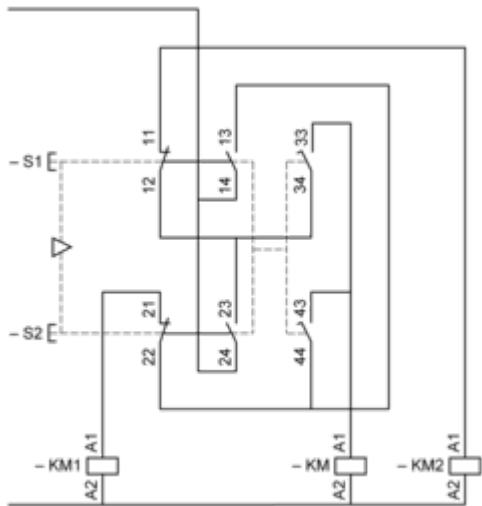

KM High speed contactor