



# Head for key selector switch, Harmony XB4, Ø22 mm 3 position spring return 4 multichips

ZB4BG08K

! Discontinued on: Jun 30, 2023



## Main

Range Of Product	Harmony XB4			
Product Or Component Type	Head for key selector switch			
Device Short Name	ZB4			
Bezel Material	Chromium plated metal			
Mounting Diameter	0.87 in (22 mm)			
Head Type	Standard			
Sale Per Indivisible Quantity	1			
Shape Of Signaling Unit Head	Round			
Return	Right to centre			
Operator Profile	Black key switch			
Type Of Operator	Spring return			
Operator Position Information	3 positions +/- 45°			
Type Of Keylock	Special key			
Product Compatibility	4 multi-chip			
Key Withdrawal Position	Left			

# Complementary

Cad Overall Width	1.14 in (29 mm)				
Cad Overall Height	1.14 in (29 mm)				
Cad Overall Depth	2.83 in (72 mm)				
Resistance To High Pressure Washer	1015.26 psi (7000000 Pa) 131 °F (55 °C) 0.1 m				
Mechanical Durability	1000000 cycles				
Electrical Composition Code	C3 6 single front mounting C4 6 single and double front mounting C5 5 single front mounting C6 5 single and double front mounting C7 4 single front mounting C8 4 single and double front mounting C11 3 single front mounting				
Device Presentation	Basic element				

# **Environment**

Protective Treatment

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Ambient Air Temperature For Storage	-40158 °F (-4070 °C)				
Ambient Air Temperature For Operation	-40158 °F (-4070 °C)				
Overvoltage Category	Class I IEC 60536				
Ip Degree Of Protection	IP66 IEC 60529 IP67 IP69 IP69K				
Nema Degree Of Protection	NEMA 13 NEMA 4X				
Standards	GB 14048.5 UL 508 EN/IEC 60947-5-5 EN/IEC 60947-5-4 EN/IEC 60947-5-1 EN/IEC 60947-1 CSA C22.2 No 14				
Product Certifications  CSA  BV  GL  LROS (Lloyds register of shipping)  DNV  UL Listed					
Vibration Resistance	5 gn 2500 Hz)IEC 60068-2-6				
Shock Resistance	nce 30 gn 18 ms) half sine wave acceleration IEC 60068-2-27 50 gn 11 ms) half sine wave acceleration IEC 60068-2-27				

# Ordering and shipping details

Gtin 3389110846256

# **Packing Units**

Unit Type Of Package 1	PCE		
Number Of Units In Package 1	1		
Package 1 Height	2.13 in (5.4 cm)		
Package 1 Width	3.46 in (8.8 cm)		
Package 1 Length	1.34 in (3.4 cm)		
Package 1 Weight	2.47 oz (70.0 g)		

# **Contractual warranty**

Warranty 18 months



**Green Premium**<sup>TM</sup> **label** is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO<sub>2</sub> products.

**Guide to assessing product sustainability** is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >





Transparency RoHS/REACh

# Well-being performance



Mercury Free



Rohs Exemption Information

Yes

# **Certifications & Standards**


Reach Regulation	REACh Declaration			
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope)			
China Rohs Regulation	China RoHS declaration			
Environmental Disclosure	Product Environmental Profile			
Circularity Profile	End of Life Information			
California Proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov			

# **Product data sheet**

# ZB4BG08K

**Dimensions Drawings** 

# **Dimensions**



# ZB4BG08K

#### Mounting and Clearance

# Panel Cut-out for Pushbuttons, Switches and Pilot Lights (Finished Holes, Ready for Installation)


Connectors or on Printed Circuit Board

(1)

(2)

Connection by Screw Clamp Terminals or Plug-in

**Connection by Faston Connectors** 



(1) Diameter on finished panel or support

(3)


- (2) 40 mm min. / 1.57 in. min.
- (3) 30 mm min. / 1.18 in. min.
- (4) Ø 22.5 mm / 0.89 in. recommended (Ø 22.3 mm  $_0^{+0.4}$  / 0.88 in.  $_0^{+0.016}$ )

(4)

- (5) 45 mm min. / 1.78 in. min.
- (6) 32 mm min. / 1.26 in. min.

## Pushbuttons, Switches and Pilot Lights for Printed Circuit Board Connection


#### Panel Cut-outs (Viewed from Installer's Side)

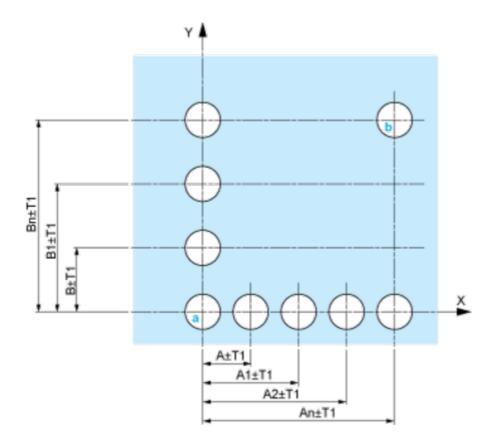

**A:** 30 mm min. / 1.18 in. min. **B:** 40 mm min. / 1.57 in. min.


Printed Circuit Board Cut-outs (Viewed from Electrical Block Side)

Dimensions in mm

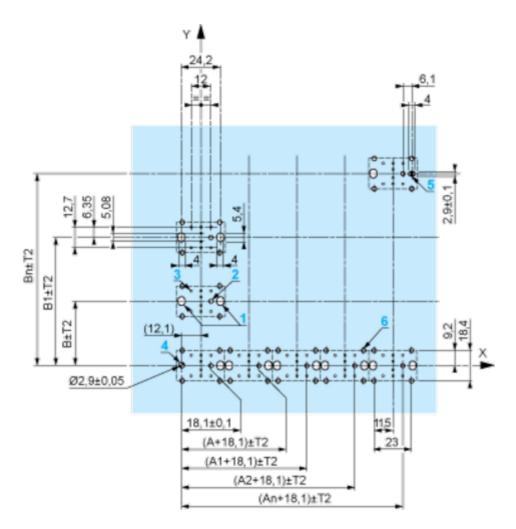

A: 30 mm min. B: 40 mm min. Dimensions in in.

#### ZB4BG08K

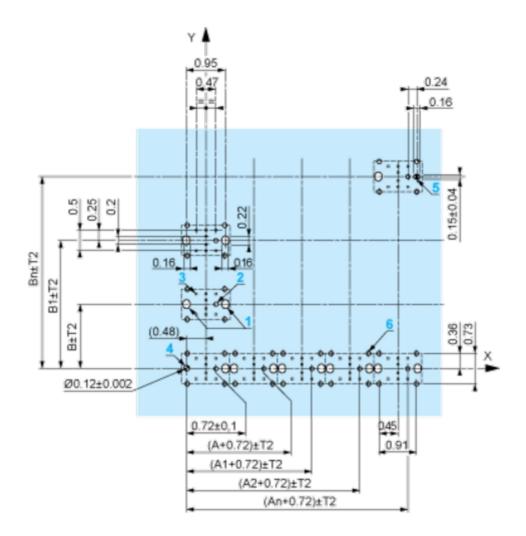

**A:** 1.18 in. min. **B:** 1.57 in. min.

#### General Tolerances of the Panel and Printed Circuit Board


The cumulative tolerance must not exceed 0.3 mm / 0.012 in: T1 + T2 = 0.3 mm max.

#### **Installation Precautions**

- $_{\bullet}$  Minimum thickness of circuit board: 1.6 mm / 0.06 in.
- Cut-out diameter: 22.4 mm ± 0.1 / 0.88 in. ± 0.004
- Orientation of body/fixing collar ZB4 BZ009: ± 2°30' (excluding cut-outs marked **a** and **b**).
- Tightening torque of screws ZBZ 006: 0.6 N.m (5.3 lbf.in) max.
- Allow for one ZB4 BZ079 fixing collar/pillar and its fixing screws:
  - $_{\circ}\;$  every 90 mm / 3.54 in. horizontally (X), and 120 mm / 4.72 in. vertically (Y).
  - o with each selector switch head (ZB4 BD•, ZB4 BJ•, ZB4 BG•).

The fixing centers marked a and b are diagonally opposed and must align with those marked 4 and 5.

#### ZB4BG08K

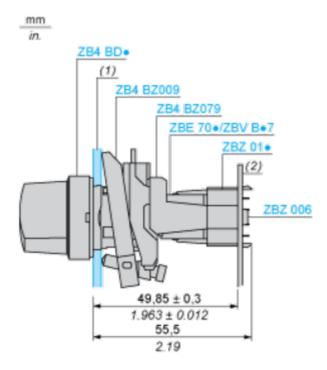

- (1) Panel
- (2) Printed circuit board


#### Mounting of Adapter (Socket) ZBZ 01•


- 1 2 elongated holes for ZBZ 006 screw access
- 2 1 hole Ø 2.4 mm ± 0.05 / 0.09 in. ± 0.002 for centring adapter ZBZ 01•
- 3 8 × Ø 1.2 mm / 0.05 in. holes
- 4 1 hole Ø 2.9 mm ± 0.05 / 0.11 in. ± 0.002, for aligning the printed circuit board (with cut-out marked a)
- 5 1 elongated hole for aligning the printed circuit board (with cut-out marked b)
- 6 4 holes Ø 2.4 mm / 0.09 in. for clipping in adapter ZBZ 01•


Dimensions An + 18.1 relate to the Ø 2.4 mm  $\pm$  0.05 / 0.09 in.  $\pm$  0.002 holes for centring adapter ZBZ 01•.

**Technical Description** 











13





**Electrical Composition Corresponding to Codes C9, C11, SF1 and SR1** 




# Legend

Single contact



Double contact



Light block



Possible location



# Sequence of Contacts Fitted to 3-position Selector Switch Body

#### Position 315°



Push	Position	Тор			
		Bottom			
	Location		Left	Centre	Right
	State		1	1	0
Contacts	N/O		closed	closed	open
	N/C		open	open	closed

## Position 0°



Position Push Location	Decition	Тор			
	Bottom			$\triangle$	
	Location		Left	Centre	Right
	State		0	0	0
Contacts	N/O		open	open	open
	N/C		closed	closed	closed

# **Product data sheet**

# ZB4BG08K

#### Position 45°



Push	Position	Тор			
		Bottom			
	Location		Left	Centre	Right
	State		0	1	1
Contacts	N/O		open	closed	closed
	N/C		closed	open	open