# **Product data sheet**

Specification





# Head for pilot light, Harmony XB5, metal, red, 22mm, plain lens for BA9s bulb

ZB5AV04

Product availability: Stock - Normally stocked in distribution facility

Price\*: 7.60 USD

# Main

Range Of Product	Harmony XB5
Product Or Component Type	Head for pilot light
Product Compatibility	BA 9s
Device Short Name	ZB5
Bezel Material	Dark grey plastic
Mounting Diameter	0.87 in (22 mm)
Head Type	Standard
Sale Per Indivisible Quantity	1
Shape Of Signaling Unit Head	Round
Cap/Operator Or Lens Colour	Red
Operator Additional Information	With plain lens

# Complementary

Cad Overall Width	1.14 in (29 mm)
Cad Overall Height	1.14 in (29 mm)
Cad Overall Depth	1.22 in (31 mm)
Net Weight	0.04 lb(US) (0.018 kg)
Station Name	XALD 15 cut-outs XALK 25 cut-outs
Electrical Composition Code	P3 front mounting BA 9s P4 front mounting BA 9s and transformer PF2 front mounting BA 9s
Device Presentation	Basic element

## **Environment**

Protective Treatment	тн
Ambient Air Temperature For Storage	-40158 °F (-4070 °C)
Ambient Air Temperature For Operation	-40158 °F (-4070 °C)
Overvoltage Category	Class II IEC 60536
Ip Degree Of Protection	IP66 IEC 60529 IP67 IEC 60529 IP69 IEC 60529 IP69K ISO 20653

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Nema Degree Of Protection	NEMA 13		
	NEMA 4X		
Resistance To High Pressure Washer	1015.26 psi (7000000 Pa) 131 °F (55 °C) 0.1 m		
Ik Degree Of Protection IK05 conforming to IEC 50102			
Standards	IEC 60947-5-1	-	
	CSA C22.2 No 14		
	IEC 60947-5-5		
	IEC 60947-5-4		
	JIS C8201-5-1		
	IEC 60947-1		
	UL 508		
	JIS C8201-1		
Vibration Resistance	5 gn 2500 Hz)IEC 60068-2-6		
Shock Resistance 30 gn 18 ms) half sine wave acceleration IEC 60068-2-27 50 gn 11 ms) half sine wave acceleration IEC 60068-2-27			

# Ordering and shipping details

Category	US10CS222467
Discount Schedule	0CS2
Gtin	3389110908091
Returnability	Yes
Country Of Origin	US

# **Packing Units**

Unit Type Of Package 1	PCE	
Number Of Units In Package 1	1	
Package 1 Height	1.77 in (4.500 cm)	
Package 1 Width	1.34 in (3.400 cm)	
Package 1 Length	2.13 in (5.400 cm)	
Package 1 Weight	0.56 oz (16.000 g)	
Unit Type Of Package 2	S03	
Number Of Units In Package 2	300	
Package 2 Height	11.81 in (30 cm)	
Package 2 Width	11.81 in (30 cm)	
Package 2 Length	15.75 in (40 cm)	
Package 2 Weight	11.48 lb(US) (5.206 kg)	
Unit Type Of Package 3	P06	
Number Of Units In Package 3	2400	
Package 3 Height	29.53 in (75.000 cm)	
Package 3 Width	31.50 in (80.000 cm)	
Package 3 Length	23.62 in (60.000 cm)	
Package 3 Weight	109.46 lb(US) (49.648 kg)	

# **Contractual warranty**

Warranty	18 months
----------	-----------



**Green Premium**<sup>TM</sup> **label** is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO<sub>2</sub> products.

**Guide to assessing product sustainability** is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >





Transparency RoHS/REACh

# Well-being performance


<b>⊘</b>	Reach Free Of Svhc	
<b>②</b>	Toxic Heavy Metal Free	
<b>②</b>	Mercury Free	
<b>⊘</b>	Rohs Exemption Information	Yes

#### **Certifications & Standards**

Reach Regulation	REACh Declaration
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope)  EU RoHS Declaration
China Rohs Regulation	China RoHS declaration
Environmental Disclosure	Product Environmental Profile
Circularity Profile	End of Life Information

# **Dimensions Drawings**


# **Dimensions**



#### Mounting and Clearance

Panel Cut-out for Pushbuttons, Switches and Pilot Lights (Finished Holes, Ready for


#### Connection by Screw Clamp Terminals or Plug-in Connectors or on Printed Circuit Board

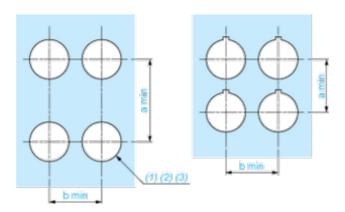

- (1) Diameter on finished panel or support
- (2) For selector switches and Emergency stop buttons, use of an anti-rotation plate type ZB5AZ902 is recommended.
- (3) Ø22.5 mm recommended (Ø22.3  $_0^{+0.4}$ ) / Ø0.89 in. recommended (Ø0.88 in.  $_0^{+0.016}$ )

				•
Connections	a in mm	a in in.	b in mm	b in in.
By screw clamp terminals or plug-in connector	40	1.57	30	1.18
By Faston connectors	45	1.77	32	1.26
On printed circuit board	30	1.18	30	1.18


#### **Detail of Lug Recess**



- (1) Diameter on finished panel or support
- (2) For selector switches and Emergency stop buttons, use of an anti-rotation plate type ZB5AZ902 is recommended. (3)  $\emptyset$ 22.5 mm recommended ( $\emptyset$ 22.3  $_0^{+0.4}$ ) /  $\emptyset$ 0.89 in. recommended ( $\emptyset$ 0.88 in.  $_0^{+0.016}$ )

## Pushbuttons, Switches and Pilot Lights for Printed Circuit Board Connection

#### Panel Cut-outs (Viewed from Installer's Side)

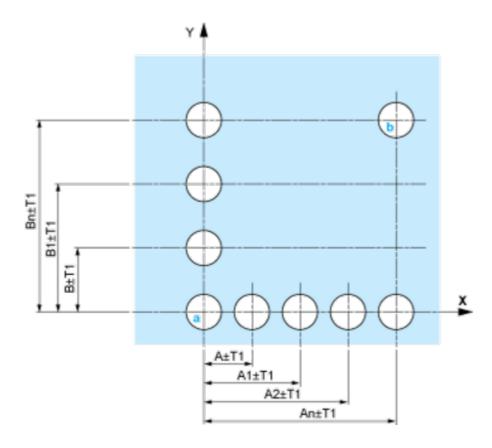


**A:** 30 mm min. / 1.18 in. min. **B:** 40 mm min. / 1.57 in. min.


Printed Circuit Board Cut-outs (Viewed from Electrical Block Side)

Dimensions in mm

# ZB5AV04

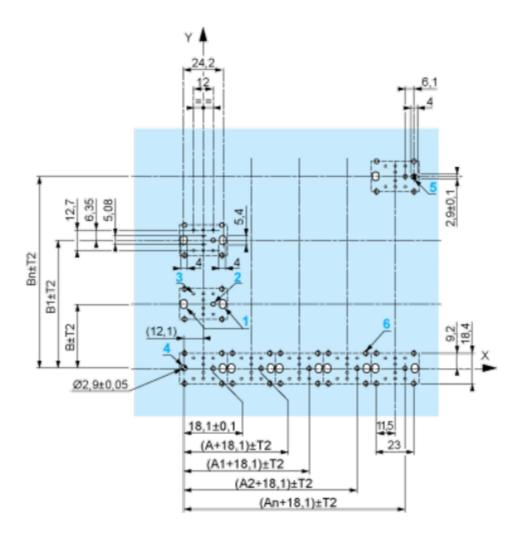

A: 30 mm min. B: 40 mm min. Dimensions in in.

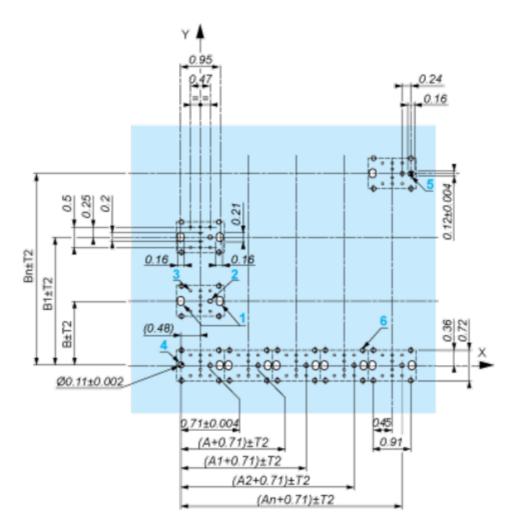

**A:** 1.18 in. min. **B:** 1.57 in. min.

#### General Tolerances of the Panel and Printed Circuit Board


The cumulative tolerance must not exceed 0.3 mm / 0.012 in.: T1 + T2 = 0.3 mm max.

#### **Installation Precautions**

- $_{\bullet}$  Minimum thickness of circuit board: 1.6 mm / 0.06 in.
- Cut-out diameter: 22.4 mm ± 0.1 / 0.88 in. ± 0.004
- Orientation of body/fixing collar ZB5AZ009: ± 2 30' (excluding cut-outs marked **a** and **b**).
- Tightening torque of screws ZBZ006: 0.6 N.m (5.3 lbf.in) max.
- Allow for one ZB5AZ079 fixing collar/pillar and its fixing screws:
  - $_{\circ}\;$  every 90 mm / 3.54 in. horizontally (X), and 120 mm / 4.72 in. vertically (Y).
  - o with each selector switch head (ZB5AD•, ZB5AJ•, ZB5AG•).

The fixing centers marked a and b are diagonally opposed and must align with those marked 4 and 5.

## ZB5AV04

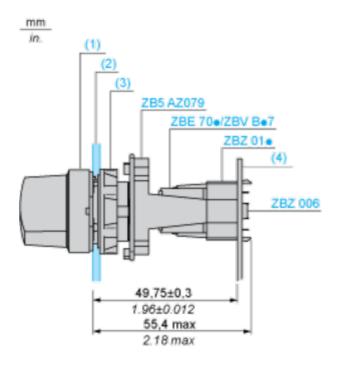

- (1) Head ZB5AD•
- (2) Panel
- (2) Nut
- (4) Printed circuit board

#### Mounting of Adapter (Socket) ZBZ01•

- 1 2 elongated holes for ZBZ006 screw access
- 2 1 hole Ø 2.4 mm ± 0.05 / 0.09 in. ± 0.002 for centring adapter ZBZ01•
- 3 8 × Ø 1.2 mm / 0.05 in. holes
- 4 1 hole Ø 2.9 mm ± 0.05 / 0.11 in. ± 0.002, for aligning the printed circuit board (with cut-out marked a)
- 5 1 elongated hole for aligning the printed circuit board (with cut-out marked b)
- 6 4 holes Ø 2.4 mm / 0.09 in. for clipping in adapter ZBZ01•

Dimensions An + 18.1 relate to the Ø 2.4 mm  $\pm$  0.05 / 0.09 in.  $\pm$  0.002 holes for centring adapter ZBZ01•.

## ZB5AV04

**Technical Description** 

Electrical Composition Corresponding to Codes P1, P3, PF1, PR1 and PF2

Light block



# **Electrical Composition Corresponding to Code P4**



# Legend

Single contact



Double contact



Light block



Possible location

