Product datasheet

Specification





variable speed drive, Easy Altivar 610, 132kW, 200hp, 380 to 460V, IP20

ATV610C13N4

Main

IVIAIII		
Range Of Product	Easy Altivar 610	
Product Or Component Type	Variable speed drive	
Product Specific Application	Fan, pump, compressor, conveyor	
Device Short Name	ATV610	
Variant	Standard version	
Product Destination	Asynchronous motors Synchronous motors	
Mounting Mode	Cabinet mount	
Emc Filter	Integrated conforming to IEC 61800-3 category C3 with 50 m	
Ip Degree Of Protection	IP20	
Type Of Cooling	Forced convection	
Supply Frequency	5060 Hz +/-5 %	
Network Number Of Phases	3 phases	
[Us] Rated Supply Voltage	380460 V - 1510 %	
Motor Power Kw	132 kW for normal duty 110 kW for heavy duty	
Motor Power Hp	200 hp for normal duty 150 hp for heavy duty	
Line Current	237 A at 380 V (normal duty) 203.8 A at 460 V (normal duty) 201 A at 380 V (heavy duty) 174.2 A at 460 V (heavy duty)	
Prospective Line Isc	50 kA	
Apparent Power	162.4 kVA at 460 V (normal duty) 138.7 kVA at 460 V (heavy duty)	
Continuous Output Current	250 A at 2.5 kHz for normal duty 211 A at 2.5 kHz for heavy duty	
Maximum Transient Current	275 A during 60 s (normal duty) 317 A during 60 s (heavy duty)	
Asynchronous Motor Control Profile	Variable torque standard Optimized torque mode Constant torque standard	
Output Frequency	0.1500 Hz	
Nominal Switching Frequency	2.5 kHz	
Switching Frequency	18 kHz adjustable	
Number Of Preset Speeds	16 preset speeds	

Communication Port Protocol	Modbus serial
Option Card	Slot A: communication card, Profibus DP V1 Slot A: digital or analog I/O extension card Slot A: relay output card

Complementary

Output Voltage	
Output Voltage	<= power supply voltage
Motor Slip Compensation	Automatic whatever the load
	Adjustable
	Can be suppressed
	Not available in permanent magnet motor law
Acceleration And Deceleration	S, U or customized
Ramps	Linear adjustable separately from 0.01 to 9000 s
Braking To Standstill	By DC injection
Protection Type	Thermal protection: motor
	Motor phase break: motor
	Thermal protection: drive
	Overheating: drive
	Overcurrent between output phases and earth: drive
	Overload of output voltage: drive
	Short-circuit protection: drive
	Motor phase break: drive
	Overvoltages on the DC bus: drive
	Line supply overvoltage: drive
	Line supply undervoltage: drive
	Line supply phase loss: drive
	Overspeed: drive
	Break on the control circuit: drive
Fraguency Baselution	Display on to 0.4 Hz
Frequency Resolution	Display unit: 0.1 Hz Analog input: 0.012/50 Hz
	7 (fiding filipat: 0.0 12/00 112
Electrical Connection	Control, screw terminal: 0.51.5 mm²
	Line side, screw terminal: 2 x 703 x 120 mm ²
	Motor, screw terminal: 3 x 703 x 120 mm ²
Connector Type	1 RJ45 (on the remote graphic terminal) for Modbus serial
Physical Interface	2-wire RS 485 for Modbus serial
Transmission Frame	RTU for Modbus serial
Transmission Rate	4.8, 9.6, 19.2, 38.4 kbit/s for Modbus serial
Type Of Polarization	No impedance for Modbus serial
Number Of Addresses	1247 for Modbus serial
Method Of Access	Slave
Supply	External supply for digital inputs: 24 V DC (1930 V), <1.25 mA, protection type:
	overload and short-circuit protection
	Internal supply for reference potentiometer (1 to 10 kOhm): 10.5 V DC +/- 5 %, <10
	mA, protection type: overload and short-circuit protection
Local Signalling	2 LEDs for local diagnostic
	LEDs for local diagnostic LED (yellow) for embedded communication status
	2 LEDs (dual colour) for communication module status
	LED's (dual colour) for communication module status LED (red) for presence of voltage
	i LED (red) for presence of vortage
Width	300 mm
Height	850 mm
	1161 mm with IP21 conformity kit
Donath	·
Depth	375 mm
Net Weight	85.5 kg
Analogue Input Number	3

Analogue Input Type	Al1, Al2, Al3 software-configurable voltage: 010 V DC, impedance: 30 kOhm, resolution 12 bits Al1, Al2, Al3 software-configurable current: 020 mA, impedance: 250 Ohm,	
	resolution 12 bits Al2, Al3 software-configurable temperature probe or water level sensor	
Discrete Input Number	6	
Discrete Input Type	DI1DI6 programmable as logic input, 24 V DC (<= 30 V), impedance: 3.5 kOhm DI5, DI6 programmable as pulse input: 030 kHz, 24 V DC (<= 30 V)	
Input Compatibility	DI1DI6: logic input level 1 PLC conforming to IEC 61131-2 DI5, DI6: pulse input level 1 PLC conforming to IEC 65A-68	
Discrete Input Logic	Positive logic (source): DI1DI6 configurable logic input, < 5 V (state 0), > 11 V	
	(state 1) Negative logic (sink): DI1DI6 configurable logic input, > 16 V (state 0), < 10 V (state	
	1) Positive logic (source): DI5, DI6 configurable pulse input, < 0.6 V (state 0), > 2.5 V (state 1)	
Analogue Output Number	2	
Analogue Output Type	Software-configurable current AQ1, AQ2: 020 mA, resolution 10 bits Software-configurable voltage AQ1, AQ2: 010 V DC impedance 470 Ohm, resolution 10 bits	
Sampling Duration	5 ms +/- 0.1 ms (Al1, Al2, Al3) - analog input	
	2 ms +/- 0.5 ms (DI1DI6)configurable - discrete input 5 ms +/- 1 ms (DI5, DI6)configurable - pulse input	
•	10 ms +/- 1 ms (AQ1, AQ2) - analog output	
Accuracy	+/- 0.6 % Al1, Al2, Al3 for a temperature variation 60 °C analog input +/- 1 % AQ1, AQ2 for a temperature variation 60 °C analog output	
Linearity Error	AI1, AI2, AI3: +/- 0.15 % of maximum value for analog input AQ1, AQ2: +/- 0.2 % for analog output	
Relay Output Number	3	
Relay Output Type	Configurable relay logic R1: fault relay NO/NC electrical durability 100000 cycles Configurable relay logic R2: sequence relay NO electrical durability 100000 cycles Configurable relay logic R3: sequence relay NO electrical durability 100000 cycles	
Refresh Time	Relay output (R1, R2, R3): 5 ms (+/- 0.5 ms)	
Minimum Switching Current	Relay output R1, R2, R3: 5 mA at 24 V DC	
Maximum Switching Current	Relay output R1, R2, R3 on resistive load, cos phi = 1: 3 A at 250 V AC Relay output R1, R2, R3 on resistive load, cos phi = 1: 3 A at 30 V DC Relay output R1, R2, R3 on inductive load, cos phi = 0.4 and L/R = 7 ms: 2 A at 250 V AC Relay output R1, R2, R3 on inductive load, cos phi = 0.4 and L/R = 7 ms: 2 A at 30 V	
	DC	
Isolation	Between power and control terminals	
Insulation Resistance	> 1 MOhm 500 V DC for 1 minute to earth	
Environment		
Noise Level	76 dB conforming to 86/188/EEC	
Power Dissipation In W	2755 W(forced convection) at 380 V, switching frequency 2.5 kHz	
Operating Position	Vertical +/- 10 degree	
Electromagnetic Compatibility	Electrostatic discharge immunity test level 3 conforming to IEC 61000-4-2 Radiated radio-frequency electromagnetic field immunity test level 3 conforming to IEC 61000-4-3 Electrical fast transient/burst immunity test level 4 conforming to IEC 61000-4-4 1.2/50 µs - 8/20 µs surge immunity test level 3 conforming to IEC 61000-4-5 Conducted radio-frequency immunity test level 3 conforming to IEC 61000-4-6	
Pollution Degree	2 conforming to IEC 61800-5-1	
Vibration Resistance	1.5 mm peak to peak (f= 213 Hz) conforming to IEC 60068-2-6 1 gn (f= 13200 Hz) conforming to IEC 60068-2-6	

Shock Resistance	6 gn for 11 ms conforming to IEC 60068-2-27	
Relative Humidity	595 % without condensation conforming to IEC 60068-2-3	
Ambient Air Temperature For Operation	-1545 °C (without derating) 4560 °C (with derating factor)	
Operating Altitude	<= 1000 m without derating 10004800 m with current derating 1 % per 100 m	
Environmental Characteristic	Chemical pollution resistance class 3C3 conforming to IEC 60721-3-3 Dust pollution resistance class 3S3 conforming to IEC 60721-3-3	
Standards	IEC 61800-3 Environment 2 category C3 IEC 61800-3 IEC 61800-5-1 IEC 60721-3	
Marking	CE	

Packing Units

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	45.500 cm
Package 1 Width	65.500 cm
Package 1 Length	103.000 cm
Package 1 Weight	99.000 kg
Unit Type Of Package 2	PAM
Number Of Units In Package 2	2
Package 2 Height	90.000 cm
Package 2 Width	100.000 cm
Package 2 Length	120.000 cm
Package 2 Weight	211.000 kg



Green PremiumTM **label** is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >





Transparency RoHS/REACh

Resource performance



Well-being performance



Mercury Free



Rohs Exemption Information

Yes


Certifications & Standards

Reach Regulation	REACh Declaration	
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope)	
China Rohs Regulation	China RoHS declaration	
Environmental Disclosure	Product Environmental Profile	
Weee	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins	

Dimensions Drawings

Dimensions


IP20 Drives

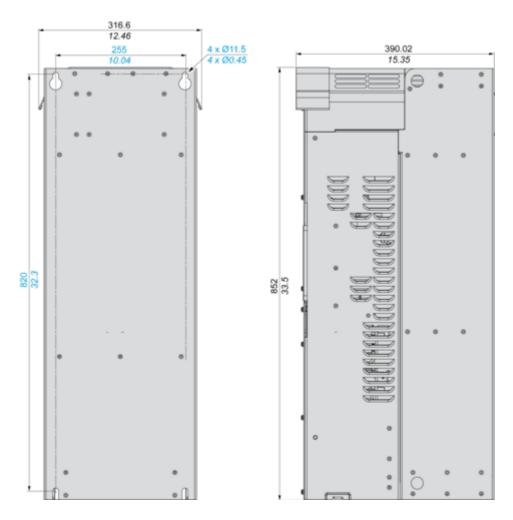

Drawings from left to right: rear view, right side view with top cover.

IP21 Drives with Lower Conduit Box Sold Separately


ATV610C13N4

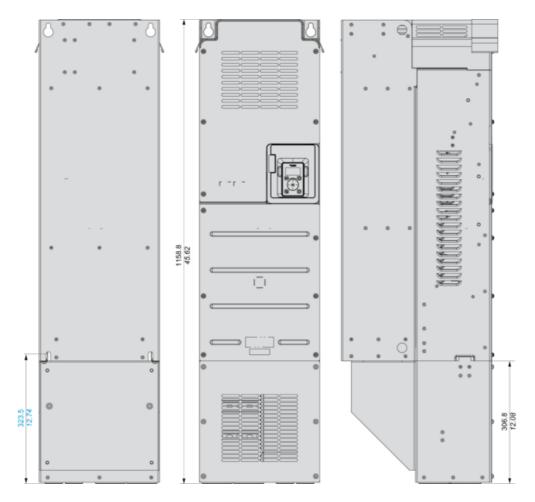

Drawings from left to right: rear view, front view and left side view with top cover.

Mounting and Clearance

Clearances

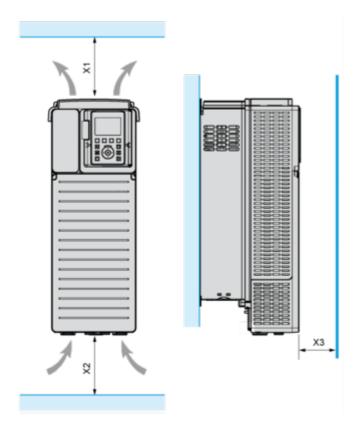


X1	X2	X3
≥ 250 mm (10 in.)	≥ 250 mm (10 in.)	≥ 100 mm (3.94 in.)

- $_{\bullet}$ Mount the device in a vertical position (±10°). This is required for cooling the device.
- Do not mount the device close to heat sources.
- Leave sufficient free space so that the air required for cooling purposes can circulate from the bottom to the top of the drive.


Mounting Types

Mounting Type A: Individual IP21

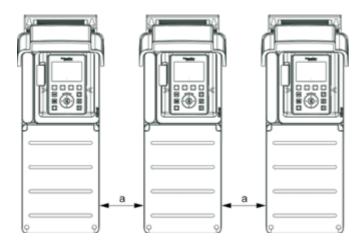


a ≥ = 110 mm (4.33 in.)

Mounting Type B: Side by Side IP20 , Only possible at ambient temperature lower than 40 $^{\circ}\text{C}$ (104 $^{\circ}\text{F})$

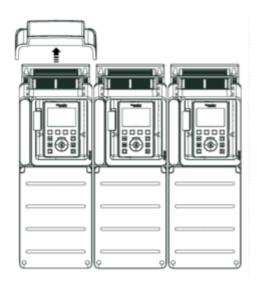

Mounting Type C: Individual IP20

ATV610C13N4

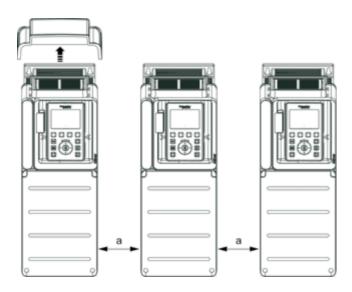


a ≥ = 110 mm (4.33 in.)

ATV610C13N4

Connections and Schema

Single or Three-phase Power Supply - Diagram With Line Contactor

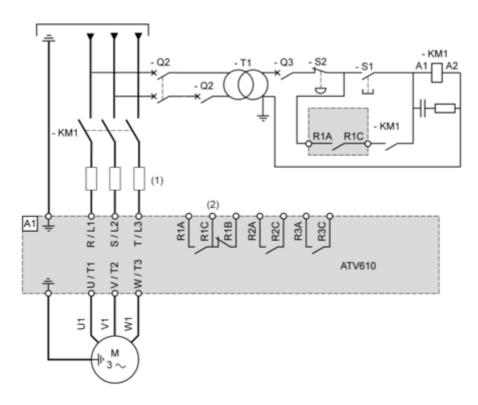

(1) Line chokes


(2) See control block wiring diagram

A1 : Drive

KM1 : Line Contactor Q2, Q3 : Circuit breakers S1, S2 : Pushbuttons

T1: Transformer for control part

Control Block Wiring Diagram

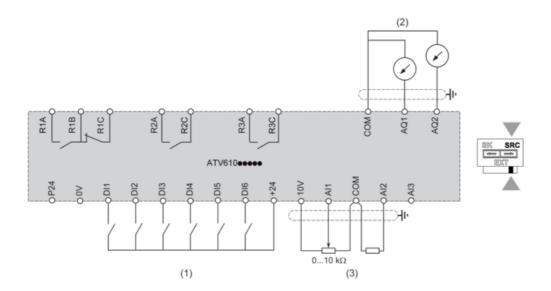


(1) Digital Input (2) Analog Output

(3) Analog Input

R1A, R1B, R1C : Fault relay output R2A, R2C : Sequence relay output R3A, R3C : Sequence relay output

Sensor Connection

It is possible to connect either 1 or 3 sensors on terminals Al2 or Al3.




Product datasheet

ATV610C13N4

Performance Curves

Derating Curves

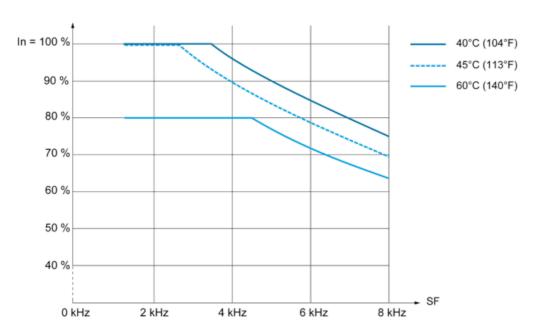

In : Nominal Drive CurrentSF : Switching Frequency