Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications



logic controller, Modicon M241, 24 IO, transistor, PNP, Ethernet

TM241CE24T

Main

Range Of Product	Modicon M241	
Product Or Component Type	Logic controller	
[Us] Rated Supply Voltage	24 V DC	
Discrete Input Number	14, discrete input 8 fast input conforming to IEC 61131-2 Type 1	
Discrete Output Type	Transistor	
Discrete Output Number	10 transistor 4 fast output	
Discrete Output Voltage	24 V DC for transistor output	
Discrete Output Current	0.5 A for transistor output (Q0Q9) 0.1 A for fast output (PTO mode) (Q0Q3)	

Complementary

•	
Discrete I/O Number	24
Maximum Number Of I/O Expansion Module	7 (local I/O-Architecture) 14 (remote I/O-Architecture)
Supply Voltage Limits	20.428.8 V
Inrush Current	50 A
Power Consumption In W	32.640.4 W (with max number of I/O expansion module)
Discrete Input Logic	Sink or source
Discrete Input Voltage	24 V
Discrete Input Voltage Type	DC
Voltage State 1 Guaranteed	>= 15 V for input
Voltage State 0 Guaranteed	<= 5 V for input
Discrete Input Current	5 mA for input 10.7 mA for fast input
Input Impedance	4.7 kOhm for input 2.81 kOhm for fast input
Response Time	50 μs turn-on, 10113 terminal(s) for input 50 μs turn-off, 10113 terminal(s) for input <= 2 μs turn-on, 1017 terminal(s) for fast input <= 2 μs turn-off, 1017 terminal(s) for fast input <= 34 μs turn-on, Q0Q9 terminal(s) for output <= 250 μs turn-off, Q0Q9 terminal(s) for output <= 2 μs turn-on, Q0Q3 terminal(s) for fast output <= 2 μs turn-off, Q0Q3 terminal(s) for fast output

1 µs for fast input
12 ms for fast input
0 ms for input 1 ms for input
4 ms for input
12 ms for input
Positive logic (source)
30 V DC
2 A with Q0Q3 for fast output
2 A with Q4Q7 for output
1 A with Q8Q9 for output
20 ld le fau fact autout (DIA/M manda)
20 kHz for fast output (PWM mode) 100 kHz for fast output (PLS mode)
1 kHz for output
1/ 0.4 % at 0.02
+/- 0.1 % at 0.020.1 kHz for fast output +/- 1 % at 0.11 kHz for fast output
<u> </u>
5 μA for output
<1 V
<2.4 W
Short-circuit protection
Short-circuit and overload protection with automatic reset
Reverse polarity protection for fast output
10 ms automatic reset output
12 s automatic reset fast output
64 MB for system memory RAM
128 MB built-in flash memory for backup of user programs
<= 16 GB SD card (optional)
BR2032 lithium non-rechargeable, battery life: 4 year(s)
2 years at 25 °C
0.3 ms for event and periodic task
0.7 ms for other instruction
8 external event tasks
8 event tasks
3 cyclic master tasks + 1 freewheeling task 4 cyclic master tasks
With
<= 60 s/month at 25 °C
C= 60 S/month at 25 C
PTO function 4 channel(s) (positioning frequency: 100 kHz) PTO function 4 channel(s) for transistor output (positioning frequency: 1 kHz)
4 fast input (HSC mode) at 200 kHz
14 standard input at 1 kHz
A/B at 100 kHz for fast input (HSC mode)
Pulse/direction at 200 kHz for fast input (HSC mode)
Single phase at 200 kHz for fast input (HSC mode)
Non isolated serial link serial 1 with RJ45 connector and RS232/RS485 interface
Non isolated serial link serial i with 1045 confidence and 10252/10465 interface
Non isolated serial link serial 2 with removable screw terminal block connector and
Non isolated serial link serial 2 with removable screw terminal block connector and RS485 interface
Non isolated serial link serial 2 with removable screw terminal block connector and RS485 interface USB port with mini B USB 2.0 connector
Non isolated serial link serial 2 with removable screw terminal block connector and RS485 interface USB port with mini B USB 2.0 connector Ethernet with RJ45 connector
Non isolated serial link serial 2 with removable screw terminal block connector and RS485 interface USB port with mini B USB 2.0 connector
Non isolated serial link serial 2 with removable screw terminal block connector and RS485 interface USB port with mini B USB 2.0 connector Ethernet with RJ45 connector (serial 1)serial link supply: 5 V, <200 mA 1.2115.2 kbit/s (115.2 kbit/s by default) for bus length of 15 m for RS485
Non isolated serial link serial 2 with removable screw terminal block connector and RS485 interface USB port with mini B USB 2.0 connector Ethernet with RJ45 connector (serial 1)serial link supply: 5 V, <200 mA 1.2115.2 kbit/s (115.2 kbit/s by default) for bus length of 15 m for RS485 1.2115.2 kbit/s (115.2 kbit/s by default) for bus length of 3 m for RS232
Non isolated serial link serial 2 with removable screw terminal block connector and RS485 interface USB port with mini B USB 2.0 connector Ethernet with RJ45 connector (serial 1)serial link supply: 5 V, <200 mA 1.2115.2 kbit/s (115.2 kbit/s by default) for bus length of 15 m for RS485

Communication Port Protocol	Non isolated serial link: Modbus master/slave
Port Ethernet	10BASE-T/100BASE-TX - 1 port(s) copper cable
Ethernet Services	FDR
	DHCP server via TM4 Ethernet switch network module DHCP client embedded Ethernet port
	SMS notifications
	Updating firmware
	SNMP client/server
	Programming
	NGVL
	Monitoring IEC VAR ACCESS
	FTP client/server
	Downloading
	SQL client
	Modbus TCP client I/O scanner
	Ethernet/IP originator I/O scanner embedded Ethernet port Ethernet/IP target, Modbus TCP server and Modbus TCP slave
	Send and receive email from the controller based on TCP/UDP library
	Web server (WebVisu & XWeb system)
	OPC UA server
	DNS client
Local Signalling	1 LED (green) for PWR
JJ	1 LED (green) for RUN
	1 LED (red) for module error (ERR)
	1 LED (red) for I/O error (I/O)
	1 LED (green) for SD card access (SD)
	1 LED (red) for BAT
	1 LED (green) for SL1 1 LED (green) for SL2
	1 LED (green) for SE2 1 LED (red) for bus fault on TM4 (TM4)
	1 LED per channel (green) for I/O state
	1 LED (green) for Ethernet port activity
Electrical Connection	removable screw terminal blockfor inputs and outputs (pitch 5.08 mm)
	removable screw terminal blockfor connecting the 24 V DC power supply (pitch 5.08
	mm)
Maximum Cable Distance	Unshielded cable: <50 m for input
Between Devices	Shielded cable: <10 m for fast input
	Unshielded cable: <50 m for output
	Shielded cable: <3 m for fast output
Insulation	Between supply and internal logic at 500 V AC
	Non-insulated between supply and ground
	Between input and internal logic at 500 V AC
	Non-insulated between inputs
	Between fast input and internal logic at 500 V AC Between output and internal logic at 500 V AC
	Non-insulated between outputs
	Between fast output and internal logic at 500 V AC
	Between output groups at 500 V AC
Marking	CE
Surge Withstand	1 kV power lines (DC) common mode conforming to IEC 61000-4-5
ourge withstand	1 kV shielded cable common mode conforming to IEC 61000-4-5
	0.5 kV power lines (DC) differential mode conforming to IEC 61000-4-5
	1 kV relay output differential mode conforming to IEC 61000-4-5
	1 kV input common mode conforming to IEC 61000-4-5
	1 kV transistor output common mode conforming to IEC 61000-4-5
Web Services	Web server
Maximum Number Of	8 Modbus server
Connections	8 SoMachine protocol
	10 web server
	4 FTP server
	16 Ethernet/IP target 8 Modbus client
Number Of Server Device(S)	64 Modbus TCP:
	16 EtherNet/IP:
Cycle Time	10 ms 16 EtherNet/IP
	64 ms 64 Modbus TCP

Mounting Support	Top hat type TH35-15 rail conforming to IEC 60715
	Top hat type TH35-7.5 rail conforming to IEC 60715
	plate or panel with fixing kit
Height	90 mm
Depth	95 mm
Width	150 mm
Net Weight	0.53 kg
Environment	
Standards	ANSI/ISA 12-12-01
	CSA C22.2 No 142
	CSA C22.2 No 213
	IEC 61131-2:2007
	Marine specification (LR, ABS, DNV, GL)
	UL 508
Product Certifications	RCM
	cULus
	CE
	UKCA
	DNV-GL
	ABS
	LR
Resistance To Electrostatic	8 kV in air conforming to IEC 61000-4-2
Discharge	4 kV on contact conforming to IEC 61000-4-2
Resistance To Electromagnetic	10 V/m 80 MHz1 GHz conforming to IEC 61000-4-3
Fields	3 V/m 1.4 GHz2 GHz conforming to IEC 61000-4-3
	1 V/m 2 GHz3 GHz conforming to IEC 61000-4-3
Resistance To Fast Transients	2 kV (power lines) conforming to IEC 61000-4-4
	1 kV (Ethernet line) conforming to IEC 61000-4-4
	1 kV (serial link) conforming to IEC 61000-4-4
	1 kV (input) conforming to IEC 61000-4-4
	1 kV (transistor output) conforming to IEC 61000-4-4
Resistance To Conducted	10 V 0.1580 MHz conforming to IEC 61000-4-6
Resistance To Conducted Disturbances	
	10 V 0.1580 MHz conforming to IEC 61000-4-6

Electromagnetic Emission	Conducted emissions - test level: 12069 dBμV/m QP (power lines) at 10150 kHz conforming to IEC 55011 Conducted emissions - test level: 63 dBμV/m QP (power lines) at 1.530 MHz conforming to IEC 55011 Radiated emissions - test level: 40 dBμV/m QP class A at 30230 MHz conforming to IEC 55011 Conducted emissions - test level: 7963 dBμV/m QP (power lines) at 1501500 kHz conforming to IEC 55011 Radiated emissions - test level: 47 dBμV/m QP class A at 2301000 MHz conforming to IEC 55011
Immunity To Microbreaks	10 ms
Ambient Air Temperature For Operation	-1050 °C (vertical installation) -1055 °C (horizontal installation)
Ambient Air Temperature For Storage	-2570 °C
Relative Humidity	1095 %, without condensation (in operation) 1095 %, without condensation (in storage)
Ip Degree Of Protection	IP20 with protective cover in place
Pollution Degree	2
Operating Altitude	02000 m
Storage Altitude	03000 m

Vibration Resistance	3.5 mm at 58.4 Hz on symmetrical rail 3 gn at 8.4150 Hz on symmetrical rail 3.5 mm at 58.4 Hz on panel mounting	
Shock Resistance	3 gn at 8.4150 Hz on panel mounting	

Packing Units

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	11.33 cm
Package 1 Width	13.095 cm
Package 1 Length	18.689 cm
Package 1 Weight	640.0 g
Unit Type Of Package 2	S03
Number Of Units In Package 2	8
Package 2 Height	30 cm
Package 2 Width	30 cm
Package 2 Length	40 cm
Package 2 Weight	5.801 kg
Unit Type Of Package 3	P06
Number Of Units In Package 3	64
Package 3 Height	75.0 cm
Package 3 Width	40.0 cm
Package 3 Length	80.0 cm
Package 3 Weight	58.4 kg

Sustainability

Green PremiumTM label is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >





Transparency RoHS/REACh

Well-being performance

Mercury Free

Rohs Exemption Information

Yes



Pvc Free

Certifications & Standards


Reach Regulation	REACh Declaration
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope)
China Rohs Regulation	China RoHS declaration
Environmental Disclosure	Product Environmental Profile
Weee	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins
Circularity Profile	End of Life Information
California Proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov


Product data sheet

TM241CE24T

Dimensions Drawings


Dimensions




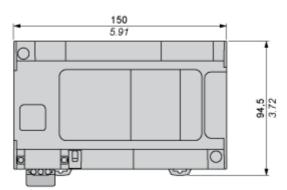


Mounting and Clearance

Clearance

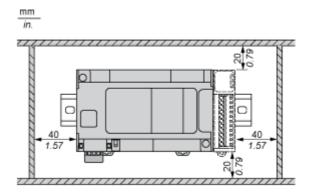




Mounting Position

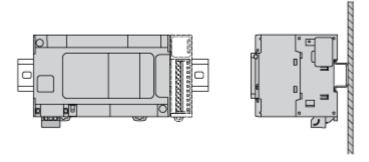


Acceptable Mounting




NOTE: Expansion modules must be mounted above the logic controller.

Incorrect Mounting

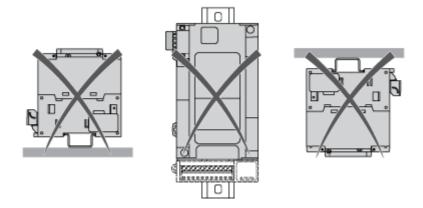

Direct Mounting On a Panel Surface


Mounting Hole Layout

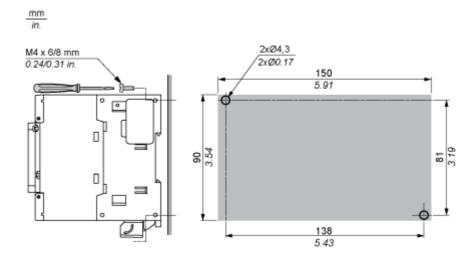


Connections and Schema

Digital Inputs

Wiring Diagram

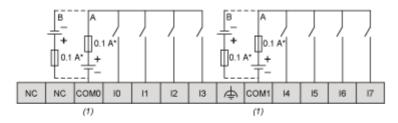



(*): Type T fuse

(1): The COM0, COM1 and COM2 terminals are not connected internally

(A): Sink wiring (positive logic)


(B): Source wiring (negative logic)

Fast Input Wiring (I0...I7)



Fast Transistor Outputs


Wiring Diagram



(*): 2 A fast-blow fuse

Transistor Outputs

Wiring Diagram




(*): Type T fuse


(1): The V1+ and V2+ terminals are not connected internally.

(2): The V1- and V2- terminals are not connected internally.

USB Mini-B Connection

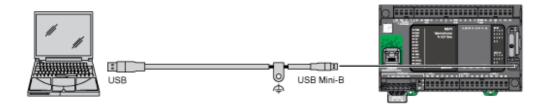

Ethernet Connection to a PC

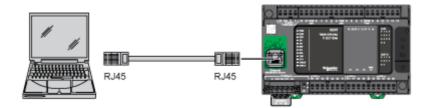

15

Apr 19, 2024