Specifications



Head for selector switch, Harmony XB4, metal, black, 22mm, 2 positions, stay put

ZB4BD2

Main

Range Of Product	Harmony XB4			
Product Or Component Type	Head for selector switch			
Device Short Name	ZB4			
Bezel Material	Chromium plated metal			
Mounting Diameter	22 mm			
Head Type	Standard			
Sale Per Indivisible Quantity	1			
Shape Of Signaling Unit Head	Round			
Type Of Operator	stay put			
Operator Profile	Black standard handle			
Operator Position Information	2 positions 90°			

Complementary

Cad Overall Width	29 mm				
Cad Overall Height	29 mm				
Cad Overall Depth	44 mm				
Net Weight	0.04 kg				
Resistance To High Pressure Washer	7000000 Pa at 55 °C, distance : 0.1 m				
Mechanical Durability	1000000 cycles				
Electrical Composition Code	C3 for <6 contacts using single blocks in front mounting C4 for <6 contacts using single and double blocks in front mounting C5 for <5 contacts using single blocks in front mounting C6 for <5 contacts using single and double blocks in front mounting C7 for <4 contacts using single blocks in front mounting C8 for <4 contacts using single and double blocks in front mounting C11 for <3 contacts using single blocks in front mounting C15 for <1 contacts using single blocks in front mounting				
Device Presentation	Basic element				

Environment

Protective Treatment	ТН
Ambient Air Temperature For Storage	-4070 °C
Ambient Air Temperature For Operation	-4070 °C
Overvoltage Category	Class I conforming to IEC 60536

IP67 conforming to IEC 60529			
IP69			
IP69K			
NEMA 13			
NEMA 4X			
IK06 conforming to IEC 50102			
JIS C8201-5-1			
IEC 60947-5-1			
IEC 60947-5-4			
IEC 60947-1			
CSA C22.2 No 14			
IEC 60947-5-5			
UL 508			
JIS C8201-1			
BV			
LROS (Lloyds register of shipping)			
DNV			
UL listed			
CSA			
GL			
5 gn (f= 2500 Hz) conforming to IEC 60068-2-6			
30 gn (duration = 18 ms) for half sine wave acceleration conforming to IEC 60068-2-27			
50 gn (duration = 11 ms) for half sine wave acceleration conforming to IEC 60068-2-27			

Packing Units

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	3.500 cm
Package 1 Width	5.400 cm
Package 1 Length	5.400 cm
Package 1 Weight	44.000 g
Unit Type Of Package 2	BB1
Number Of Units In Package 2	5
Package 2 Height	5.200 cm
Package 2 Width	3.400 cm
Package 2 Length	26.500 cm
Package 2 Weight	224.000 g
Unit Type Of Package 3	S03
Number Of Units In Package 3	250
Package 3 Height	30.000 cm
Package 3 Width	30.000 cm
Package 3 Length	40.000 cm
Package 3 Weight	11.706 kg

Contractual warranty

Warranty

18 months

Sustainability

Green PremiumTM label is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >



Eq

Transparency RoHS/REACh

Well-being performance


Reach Free Of Svhc
Toxic Heavy Metal Free
Mercury Free
Rohs Exemption Information Yes

Certifications & Standards

Reach Regulation	REACh Declaration
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
China Rohs Regulation	China RoHS declaration
Environmental Disclosure	Product Environmental Profile
Circularity Profile	End of Life Information
California Proposition 65	WARNING: This product can expose you to chemicals including: Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

Dimensions Drawings

Dimensions




Mounting and Clearance

Panel Cut-out for Pushbuttons, Switches and Pilot Lights (Finished Holes, Ready for Installation)



Pushbuttons, Switches and Pilot Lights for Printed Circuit Board Connection


Panel Cut-outs (Viewed from Installer's Side)

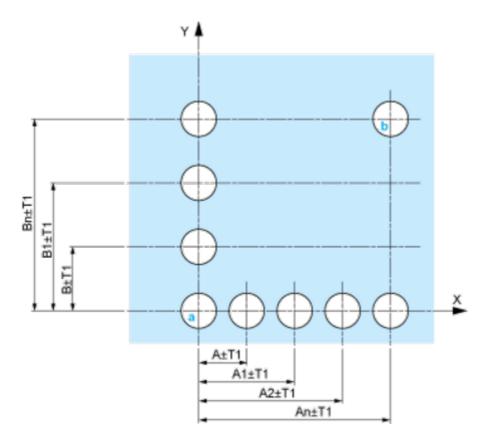


A: 30 mm min. / 1.18 in. min. **B:** 40 mm min. / 1.57 in. min.

Printed Circuit Board Cut-outs (Viewed from Electrical Block Side)

Dimensions in mm

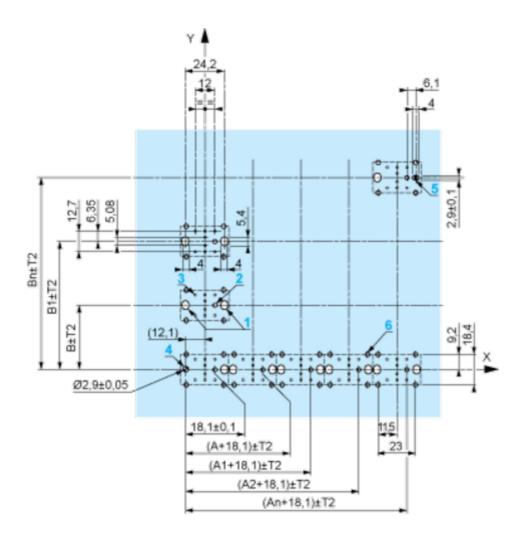

A: 30 mm min. B: 40 mm min. Dimensions in in.

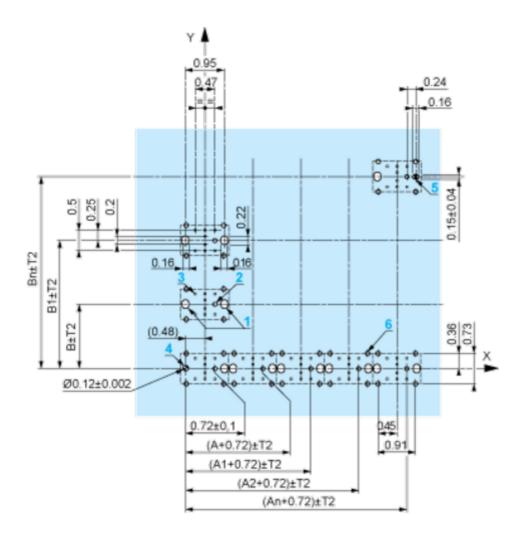

A: 1.18 in. min. **B:** 1.57 in. min.


General Tolerances of the Panel and Printed Circuit Board

The cumulative tolerance must not exceed 0.3 mm / 0.012 in: T1 + T2 = 0.3 mm max.

Installation Precautions

- Minimum thickness of circuit board: 1.6 mm / 0.06 in.
- Cut-out diameter: 22.4 mm ± 0.1 / 0.88 in. ± 0.004
- Orientation of body/fixing collar ZB4 BZ009: ± 2 30' (excluding cut-outs marked **a** and **b**).
- Tightening torque of screws ZBZ 006: 0.6 N.m (5.3 lbf.in) max.
- Allow for one ZB4 BZ079 fixing collar/pillar and its fixing screws:
 - $_{\circ}$ every 90 mm / 3.54 in. horizontally (X), and 120 mm / 4.72 in. vertically (Y).
 - o with each selector switch head (ZB4 BD•, ZB4 BJ•, ZB4 BG•).

The fixing centers marked a and b are diagonally opposed and must align with those marked 4 and 5.

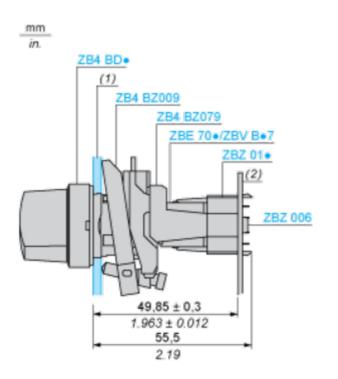

(1) Panel

(2) Printed circuit board


Mounting of Adapter (Socket) ZBZ 01•


- 1 2 elongated holes for ZBZ 006 screw access
- $_{\bullet}$ 2 1 hole Ø 2.4 mm ± 0.05 / 0.09 in. ± 0.002 for centring adapter ZBZ 01-
- 3 8 × Ø 1.2 mm / 0.05 in. holes
- 4 1 hole Ø 2.9 mm ± 0.05 / 0.11 in. ± 0.002, for aligning the printed circuit board (with cut-out marked a)
- 5 1 elongated hole for aligning the printed circuit board (with cut-out marked b)
- 6 4 holes Ø 2.4 mm / 0.09 in. for clipping in adapter ZBZ 01•


Dimensions An + 18.1 relate to the Ø 2.4 mm \pm 0.05 / 0.09 in. \pm 0.002 holes for centring adapter ZBZ 01•.


Technical Description














Electrical Composition Corresponding to Codes C9, C11, SF1 and SR1



Electrical Composition Corresponding to Code C15

1 N/O



1 N/C



1 N/O + N/C or 1 N/O + N/O or 1 N/C + N/C



Legend

Single contact



Double contact



Light block



Possible location



Sequence of Contacts Fitted to 2-position Selector Switch Body

Position 315°



Push	Position	Тор			
		Bottom	\bigtriangleup	\bigtriangleup	\bigtriangleup
	Location		Left	Centre	Right
	State		0	0	0
Contacta	N/O		open	open	open
Contacts	N/C		closed	closed	closed

Position 45°



	Position	Тор			
Push		Bottom			
	Location		Left	Centre	Right
	State		1	1	1
Contacts	N/O		closed	closed	closed
	N/C		open	open	open