

Emergency stop head, Harmony XB4, switching off, metal, red mushroom 60mm, 22mm, trigger latching push pull

ZB4BX84

Main

Range Of Product	Harmony XB4	
Product Or Component Type	Head for emergency switching off push-button	
Device Short Name	ZB4	
Bezel Material	Chromium plated metal	
Mounting Diameter	22 mm	
Sale Per Indivisible Quantity	1	
Shape Of Signaling Unit Head	Round	
Type Of Operator	trigger action and mechanical latching	
Reset	Push-pull	
Operator Profile	Red mushroom Ø 60 mm, unmarked	
Head Type	Standard	

Complementary

Cad Overall Width	60 mm	
Cad Overall Height	60 mm	
Cad Overall Depth	56 mm	
Net Weight	0.098 kg	
Resistance To High Pressure Washer	7000000 Pa at 55 °C, distance : 0.1 m	
Mechanical Durability	300000 cycles	
Electrical Composition Code	C7 for <4 contacts using single blocks in front mounting C8 for <4 contacts using single and double blocks in front mounting C11 for <3 contacts using single blocks in front mounting C15 for <1 contacts using single blocks in front mounting C10 for <4 contacts using single and double blocks in front mounting	
Device Presentation	Basic element	

Environment

Protective Treatment	тн	
Ambient Air Temperature For Storage	-4070 °C	
Ambient Air Temperature For Operation	-4070 °C	
Electrical Shock Protection Class	Class I conforming to IEC 61140	
Ip Degree Of Protection	IP66 conforming to IEC 60529 IP67 IP69 IP69K	

Nema Degree Of Protection	NEMA 13
	NEMA 4X
	NEMA 4
	NEMA 12
Ik Degree Of Protection	IK03 conforming to IEC 50102
Standards	IEC 60947-5-4
otanuar us	UL 508
	ISO 13850
	CSA C22.2 No 14
	IEC 60364-5-53
	IEC 60947-5-5
	IEC 60947-5-1
	GB 14048.5
	JIS C8201-5-1
	IEC 60947-1
	JIS C8201-1
Product Certifications	CSA
	DNV
	UL listed
	BV
	LROS (Lloyds register of shipping)
	GL
Vibration Resistance	5 gn (f= 2500 Hz) conforming to IEC 60068-2-6
Shock Resistance	30 gn (duration = 18 ms) for half sine wave acceleration conforming to IEC 60068-2-27
	50 gn (duration = 11 ms) for half sine wave acceleration conforming to IEC 60068-2-27

Packing Units

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	8.800 cm
Package 1 Width	7.000 cm
Package 1 Length	7.000 cm
Package 1 Weight	88.000 g
Unit Type Of Package 2	S02
Number Of Units In Package 2	20
Package 2 Height	15.000 cm
Package 2 Width	30.000 cm
Package 2 Length	40.000 cm
Package 2 Weight	2.064 kg

Contractual warranty

Warranty 18 months

Sustainability

Green PremiumTM label is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >





Transparency RoHS/REACh

Well-being performance

Reach Free Of Svhc

Toxic Heavy Metal Free

Mercury Free


Rohs Exemption Information
Yes

Certifications & Standards

Reach Regulation	REACh Declaration
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
China Rohs Regulation	China RoHS declaration
Environmental Disclosure	Product Environmental Profile
Circularity Profile	End of Life Information
California Proposition 65	WARNING: This product can expose you to chemicals including: Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

Dimensions Drawings

Dimensions




ZB4BX84


Mounting and Clearance

Panel Cut-out for Pushbuttons, Switches and Pilot Lights (Finished Holes, Ready for Installation)

Connection by Screw Clamp Terminals or Plug-in Connectors or on Printed Circuit Board

Connection by Faston Connectors






- (1) Diameter on finished panel or support
- (2) 40 mm min. / 1.57 in. min.
- (3) 30 mm min. / 1.18 in. min.
- (4) Ø 22.5 mm / 0.89 in. recommended (Ø 22.3 mm $_0^{+0.4}$ / 0.88 in. $_0^{+0.016}$)
- (5) 45 mm min. / 1.78 in. min.
- (6) 32 mm min. / 1.26 in. min.

Pushbuttons, Switches and Pilot Lights for Printed Circuit Board Connection


Panel Cut-outs (Viewed from Installer's Side)

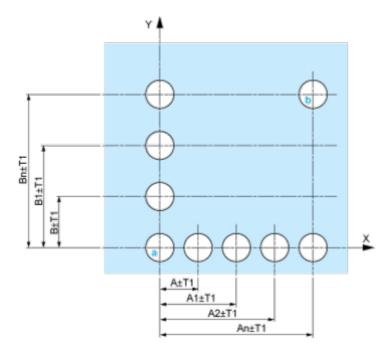

A: 30 mm min. / 1.18 in. min. **B:** 40 mm min. / 1.57 in. min.


Printed Circuit Board Cut-outs (Viewed from Electrical Block Side)

Dimensions in mm

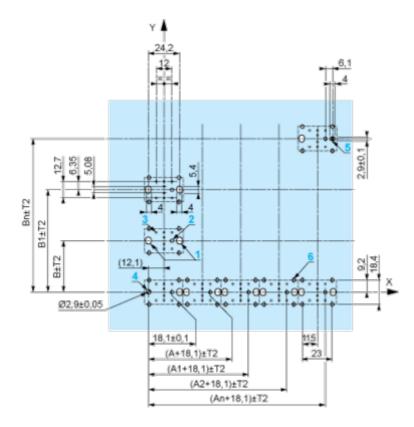

A: 30 mm min. B: 40 mm min. Dimensions in in.

ZB4BX84

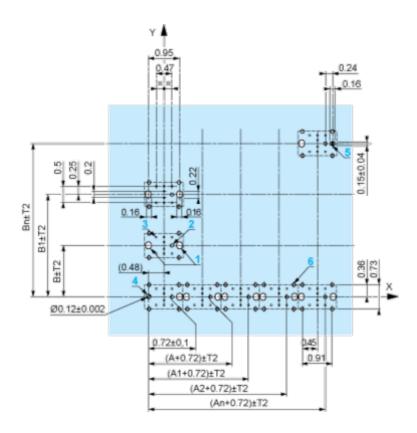

A: 1.18 in. min. **B:** 1.57 in. min.

General Tolerances of the Panel and Printed Circuit Board


The cumulative tolerance must not exceed 0.3 mm / 0.012 in: T1 + T2 = 0.3 mm max.

Installation Precautions

- Minimum thickness of circuit board: 1.6 mm / 0.06 in.
- Cut-out diameter: 22.4 mm ± 0.1 / 0.88 in. ± 0.004
- Orientation of body/fixing collar ZB4 BZ009: ± 2 30' (excluding cut-outs marked **a** and **b**).
- Tightening torque of screws ZBZ 006: 0.6 N.m (5.3 lbf.in) max.
- Allow for one ZB4 BZ079 fixing collar/pillar and its fixing screws:
 - $_{\circ}\;$ every 90 mm / 3.54 in. horizontally (X), and 120 mm / 4.72 in. vertically (Y).
 - o with each selector switch head (ZB4 BD•, ZB4 BJ•, ZB4 BG•).

The fixing centers marked **a** and **b** are diagonally opposed and must align with those marked **4** and **5**.

ZB4BX84



- (1) Panel
- (2) Printed circuit board

Mounting of Adapter (Socket) ZBZ 01•

- 1 2 elongated holes for ZBZ 006 screw access
- 2 1 hole Ø 2.4 mm ± 0.05 / 0.09 in. ± 0.002 for centring adapter ZBZ 01•
- 3 8 × Ø 1.2 mm / 0.05 in. holes
- $_{ullet}$ 4 1 hole Ø 2.9 mm \pm 0.05 / 0.11 in. \pm 0.002, for aligning the printed circuit board (with cut-out marked a)
- 5 1 elongated hole for aligning the printed circuit board (with cut-out marked b)
- . 6 4 holes Ø 2.4 mm / 0.09 in. for clipping in adapter ZBZ 01∙


Dimensions An + 18.1 relate to the Ø 2.4 mm \pm 0.05 / 0.09 in. \pm 0.002 holes for centring adapter ZBZ 01•.

Product data sheet


ZB4BX84

Technical Description

Electrical Composition Corresponding to Code C7



Electrical Compositions Corresponding to Code C8



Product data sheet

ZB4BX84

Electrical Compositions Corresponding to Code C10



Product data sheet

ZB4BX84

Electrical Composition Corresponding to Codes C9, C11, SF1 and SR1



Electrical Composition Corresponding to Code C15

1 N/O



1 N/C



1 N/O + N/C or 1 N/O + N/O or 1 N/C + N/C



13

Legend

Single contact



Double contact



Light block



Possible location

