# **Product datasheet**

Specifications





## sub-base - soldered electromechanical relays ABE7 -16 channels - relay 10 mm

ABE7R16S210E

() Discontinued on: 01 Nov 2020

① Discontinued

#### Main

Range Of Product	Modicon ABE7	
Product Or Component Type	Electromechanical output relay sub-base	
[Us] Rated Supply Voltage	24 V DC for PLC end	
Number Of Channels	16	
Connections - Terminals	Spring terminal, 1 x 0.091 x 1.5 mm² (AWG 28AWG 16) flexible with cable end Spring terminal, 1 x 0.141 x 2.5 mm² (AWG 26AWG 12) solid Spring terminal, 1 x 0.141 x 2.5 mm² (AWG 26AWG 14) flexible without cable end	

## Complementary

Terminal Block Type	Removable	
Supply Voltage Limits	30 V DC (PLC end)	
Polarity Distribution	Volt-free	
Protection Type	Internal fuse 1 A 5 x 20 mm fast blow PLC end Adjustable by external fuse high breaking capacity preactuator end	
Fixing Mode	By clips (35 mm symmetrical DIN rail) By screws (solid plate with fixing kit)	
Width	206 mm	
Maximum Current Per Output Common	10 A	
Current Per Channel	5 A for preactuator end	
Minimum Switching Current	10 mA at >= 5 V	
Drop-Out Voltage	2.4 V at 20 °C (PLC end)	
Switching Frequency	<= 10 Hz <= 0.5 Hz	
Threshold Tripping Voltage	19.7 V at 40 °C	
Drop-Out Current	1 mA at 20 °C	
Maximum Power Dissipation Per Channel In W	0.36 W (PLC end)	
Contacts Type And Composition	1 NO for preactuator end	
Maximum Switching Voltage	250 V AC 50/60 Hz conforming to IEC 60947-5-1	

30 V DC conforming to IEC 60947-5-1

Excluding VAT and subject to change. Please check with your local distributor through "Where to buy"

Electrical Durability	500000 cycles, maximum switching current: 600 mA at 24 V DC-13 10 ms			
	(preactuator end) 500000 cycles, maximum switching current: 1500 mA at 230 V AC-12 (preactuator end)			
	500000 cycles, maximum switching current: 1500 mA at 24 V DC-12 (preactuator end)			
	500000 cycles, maximum switching current: 900 mA at 230 V AC-15 (preactuator end)			
Electrical Reliability	1e-008			
Operating Time	<= 10 ms coil energisation and NO closing <= 5 ms coil de-energisation and NO opening			
Contact Bounce Time	<= 5 ms 1 NO			
Operating Rate In Hz	10 Hz no load 0.5 Hz at le			
Mechanical Durability	20000000 cycles			
[Uimp] Rated Impulse Withstand Voltage	2.5 kV conforming to IEC 60947-1			
[Ui] Rated Insulation Voltage	2000 V			
Installation Category	II conforming to IEC 60664-1			
Tightening Torque	0.6 N.m with flat Ø 3.5 mm screwdriver			
Net Weight	0.405 kg			

## Environment

Max Immunity To Microbreaks	5 ms	
Dielectric Strength	2000 V conforming to IEC 60947-1	
Ip Degree Of Protection	IP2X conforming to IEC 60529	
Resistance To Incandescent Wire	750 °C, extinction time <30 s conforming to IEC 60695-2-11	
Vibration Resistance	2 gn (f= 10150 Hz) conforming to IEC 60068-2-6	
Resistance To Electrostatic Discharge	4 kV (contact) level 3 conforming to IEC 61000-4-2 8 kV (air) level 3 conforming to IEC 61000-4-2	
Resistance To Radiated Fields	10 V/m (260000001000000000 Hz) conforming to IEC 61000-4-3 level 3	
Resistance To Fast Transients	2 kV level 3 conforming to IEC 61000-4-4	
Ambient Air Temperature For Operation	-560 °C conforming to IEC 61131-2	
Ambient Air Temperature For Storage	-4080 °C conforming to IEC 61131-2	
Pollution Degree	2 conforming to IEC 60664-1	

## **Packing Units**

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1

## **Contractual warranty**

Warranty

18 months

## Sustainability Screen Premium

**Green Premium<sup>TM</sup> label** is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO<sub>2</sub> products.

**Guide to assessing product sustainability** is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >



Transparency RoHS/REACh

### Well-being performance

Mercury Free


Rohs Exemption Information
Yes

### **Certifications & Standards**

Reach Regulation	REACh Declaration	
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope)	
China Rohs Regulation	China RoHS declaration	
Environmental Disclosure	Product Environmental Profile	
Weee	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins	
Circularity Profile	End of Life Information	

#### **Dimensions Drawings**

#### Dimensions

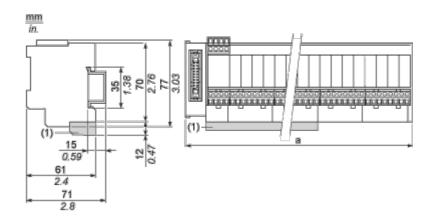


(1) ABE7BV20 / ABE7BV20E

ABE7	a in mm	a in in.
R16S111 / R16S111E	125	4.92
R16S21 / R16S21•E	206	8.11

## **Product datasheet**


Mounting and Clearance

#### Mounting

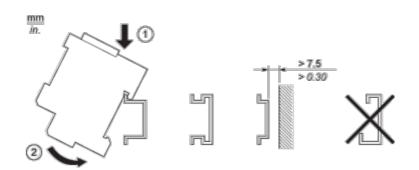


Connections and Schema

#### HE10 16 Channels



#### Wiring Diagram

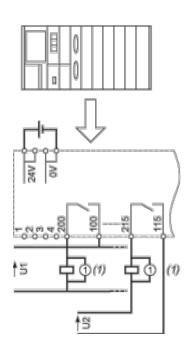


(1) Inductive load

### ABE7R16S210E

#### Performance Curves

#### Curves for Determining Cable Type and Length According to the Current


#### 16-channel Sub-base

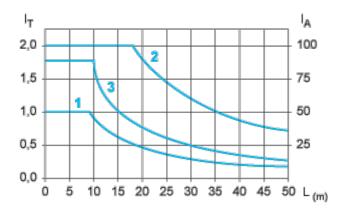


- L Cable length
- I<sub>T</sub> Total current per sub base (A)
- I<sub>A</sub> Average current per channel (mA)
- (1) TSXCDP••2 and ABFH20H••0 cables with c.s.a. 0.08 mm<sup>2</sup> (AWG 28).
- (2) TSXCDP••3 cables with c.s.a.  $0.34 \text{ mm}^2$  (AWG 22).
- (3) Cables with c.s.a. 0.13 mm<sup>2</sup> (AWG 26).

The curves are given for a voltage drop of 1 V in the cable. For n volts tolerance, multiply the length determined from the graph by n.

#### Electrical Durability (in Millions of Operating Cycles) Conforming to IEC 60947-5-1

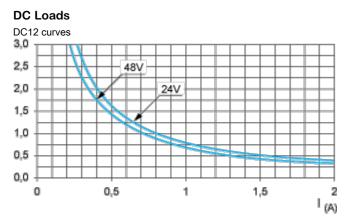



DC12 control of resistive loads and of solid state loads isolated by optocoupler,  $I/R \le 1$  ms.

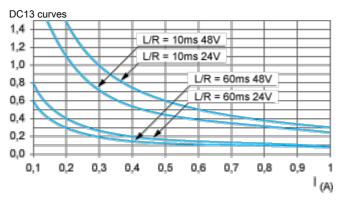

DC13 switching electromagnets,  $L/R \le 2 x$  (Ue x le) in ms, Ue: rated operational voltage, le: rated operational current (with a protective diode on the load, DC12 curves must be used with a coefficient of 0.9 applied to the number in millions of operating cycles)




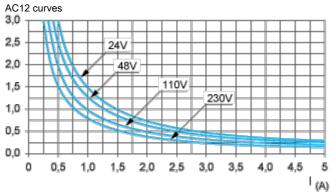




AC14 curves

**Product datasheet** 

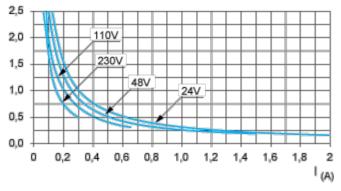

AC14 control of small electromagnetic loads  $\leq$  72 VA, make: cos  $\phi$  = 0.3, break: cos  $\phi$  = 0.3.

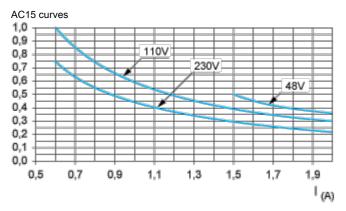

AC15 control of electromagnetic loads > 72 VA, make:  $\cos \phi = 0.7$ , break:  $\cos \phi = 0.4$ .