Product datasheet

Specification





Harmony XB4. Selector switch head. metal. black. Ø22. long handle. 3 positions. spring return to center

ZB4BJ5

Price: 434.90 ZAR

Main

Range Of Product	Harmony XB4	
Product Or Component Type	Head for selector switch	
Device Short Name	ZB4	
Bezel Material	Chromium plated metal	
Mounting Diameter	22 mm	
Head Type	Standard	
Sale Per Indivisible Quantity	1	
Shape Of Signaling Unit Head	Round	
Type Of Operator	To centre spring return	
Operator Profile	Black long handle	
Operator Additional Information	Non padlockable	
Operator Position Information	3 positions +/- 45°	

Complementary

Device Presentation	Basic element			
	C11 for <3 contacts using single blocks in front mounting			
	C8 for <4 contacts using single and double blocks in front mounting			
	C7 for <4 contacts using single blocks in front mounting			
	C6 for <5 contacts using single and double blocks in front mounting			
	C5 for <5 contacts using single blocks in front mounting			
•	C4 for <6 contacts using single and double blocks in front mounting			
Electrical Composition Code	C3 for <6 contacts using single blocks in front mounting			
Mechanical Durability	1000000 cycles			
Resistance To High Pressure Washer	7000000 Pa at 55 °C, distance : 0.1 m			
Net Weight	0.04 kg			
Cad Overall Depth	44 mm			
Cad Overall Height	38 mm			
Cad Overall Width	29 mm			

Environment

Protective Treatment	тн
Ambient Air Temperature For Storage	-4070 °C
Ambient Air Temperature For Operation	-4070 °C

Excluding VAT and subject to change. Please check with your local distributor through "Where to buy"

Overvoltage Category Class I conforming to IEC 60536		
Ip Degree Of Protection	IP67 conforming to IEC 60529	
	IP69	
	IP69K	
Nema Degree Of Protection	NEMA 13	
	NEMA 4X	
Ik Degree Of Protection	IK06 conforming to IEC 50102	
Standards	JIS C8201-5-1	
	IEC 60947-1	
	IEC 60947-5-4	
	IEC 60947-5-5	
	UL 508	
	IEC 60947-5-1	
	CSA C22.2 No 14	
	JIS C8201-1	
Product Certifications	UL listed	
	DNV	
	LROS (Lloyds register of shipping)	
	BV	
	GL	
	CSA	
Vibration Resistance	5 gn (f= 2500 Hz) conforming to IEC 60068-2-6	
Shock Resistance	30 gn (duration = 18 ms) for half sine wave acceleration conforming to IEC 60068-2-27	
	50 gn (duration = 11 ms) for half sine wave acceleration conforming to IEC 60068-2-27	

Packing Units

PCE
1
3.600 cm
5.400 cm
5.400 cm
45.200 g
BB1
5
5.000 cm
3.400 cm
26.500 cm
226.000 g
S03
250
30.000 cm
30.000 cm
40.000 cm
11.824 kg

Contractual warranty

Warranty 18 months



Green PremiumTM **label** is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >





Transparency RoHS/REACh

Well-being performance

⊘	Reach Free Of Svhc	
②	Toxic Heavy Metal Free	
9	Mercury Free	
⊘	Rohs Exemption Information	Yes


Certifications & Standards

Reach Regulation	REACh Declaration			
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration			
China Rohs Regulation	China RoHS declaration			
Environmental Disclosure	Product Environmental Profile			
Circularity Profile	End of Life Information			

ZB4BJ5

Dimensions Drawings

Dimensions

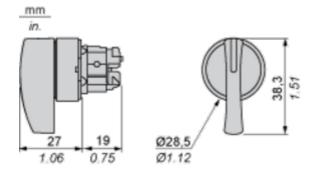


ZB4BJ5


Mounting and Clearance

Panel Cut-out for Pushbuttons, Switches and Pilot Lights (Finished Holes, Ready for Installation)

Connection by Screw Clamp Terminals or Plug-in Connectors or on Printed Circuit Board

Connection by Faston Connectors

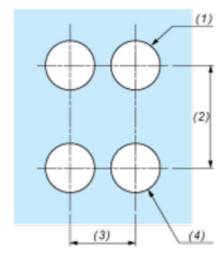


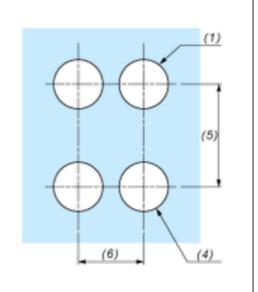

- (1) Diameter on finished panel or support
- (2) 40 mm min. / 1.57 in. min.
- (3) 30 mm min. / 1.18 in. min.
- (4) Ø 22.5 mm / 0.89 in. recommended (Ø 22.3 mm $_0^{+0.4}$ / 0.88 in. $_0^{+0.016}$)
- (5) 45 mm min. / 1.78 in. min.
- (6) 32 mm min. / 1.26 in. min.

Pushbuttons, Switches and Pilot Lights for Printed Circuit Board Connection

Panel Cut-outs (Viewed from Installer's Side)

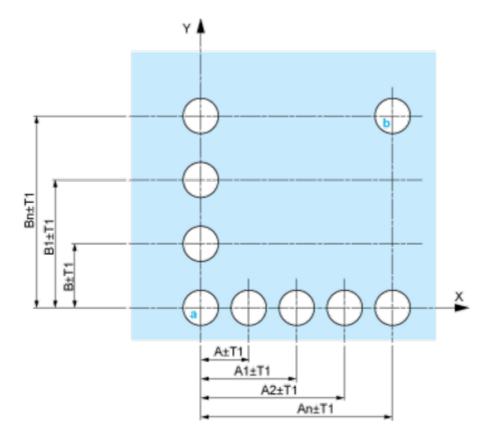


A: 30 mm min. / 1.18 in. min. **B:** 40 mm min. / 1.57 in. min.


Printed Circuit Board Cut-outs (Viewed from Electrical Block Side)

Dimensions in mm

ZB4BJ5

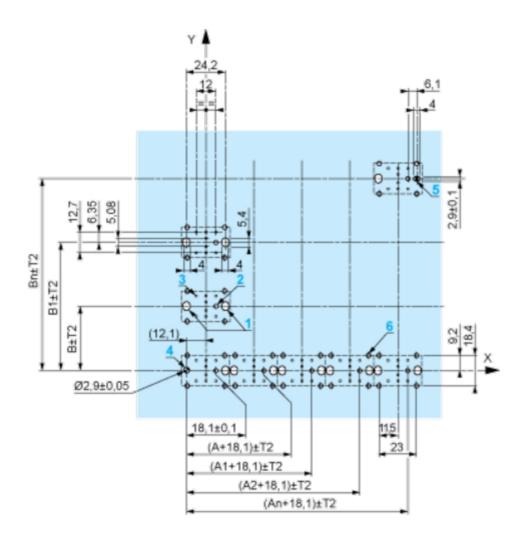

A: 30 mm min. B: 40 mm min. Dimensions in in.

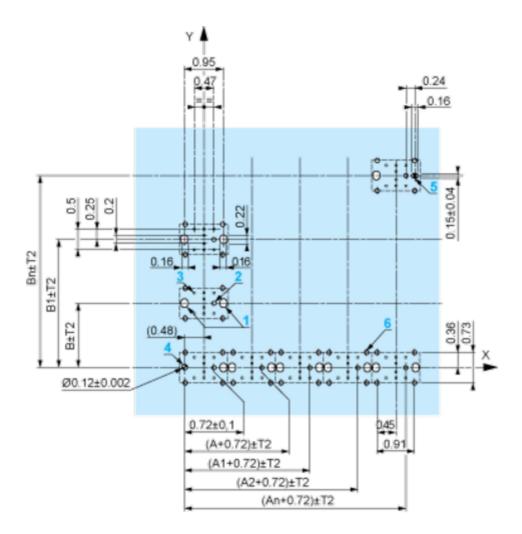

A: 1.18 in. min. **B:** 1.57 in. min.


General Tolerances of the Panel and Printed Circuit Board

The cumulative tolerance must not exceed 0.3 mm / 0.012 in: T1 + T2 = 0.3 mm max.

Installation Precautions

- $_{\bullet}$ Minimum thickness of circuit board: 1.6 mm / 0.06 in.
- Cut-out diameter: 22.4 mm ± 0.1 / 0.88 in. ± 0.004
- Orientation of body/fixing collar ZB4 BZ009: ± 2°30' (excluding cut-outs marked **a** and **b**).
- Tightening torque of screws ZBZ 006: 0.6 N.m (5.3 lbf.in) max.
- Allow for one ZB4 BZ079 fixing collar/pillar and its fixing screws:
 - $_{\circ}\;$ every 90 mm / 3.54 in. horizontally (X), and 120 mm / 4.72 in. vertically (Y).
 - o with each selector switch head (ZB4 BD•, ZB4 BJ•, ZB4 BG•).

The fixing centers marked a and b are diagonally opposed and must align with those marked 4 and 5.

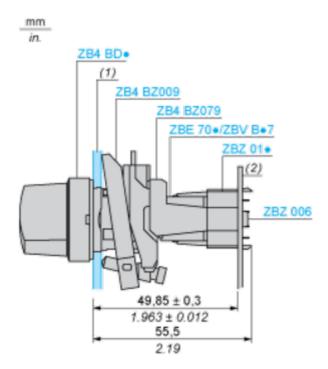


- (1) Panel
- (2) Printed circuit board

Mounting of Adapter (Socket) ZBZ 01•


- 1 2 elongated holes for ZBZ 006 screw access
- 2 1 hole Ø 2.4 mm ± 0.05 / 0.09 in. ± 0.002 for centring adapter ZBZ 01•
- 3 8 × Ø 1.2 mm / 0.05 in. holes
- 4 1 hole Ø 2.9 mm ± 0.05 / 0.11 in. ± 0.002, for aligning the printed circuit board (with cut-out marked a)
- 5 1 elongated hole for aligning the printed circuit board (with cut-out marked b)
- 6 4 holes Ø 2.4 mm / 0.09 in. for clipping in adapter ZBZ 01•

Dimensions An + 18.1 relate to the \varnothing 2.4 mm \pm 0.05 / 0.09 in. \pm 0.002 holes for centring adapter ZBZ 01•.


Technical Description














Electrical Composition Corresponding to Codes C9, C11, SF1 and SR1




Legend

Single contact



Double contact



Light block



Possible location



Sequence of Contacts Fitted to 3-position Selector Switch Body

Position 315°



	Position	Тор			
Push		Bottom			
	Location		Left	Centre	Right
	State		1	1	0
Contacts	N/O		closed	closed	open
	N/C		open	open	closed

Position 0°



Push	Position	Тор			
		Bottom			
	Location		Left	Centre	Right
	State		0	0	0
Contacts	N/O		open	open	open
	N/C		closed	closed	closed

Position 45°



	Position	Тор			
Push		Bottom			
	Location		Left	Centre	Right
	State		0	1	1
Contacts	N/O		open	closed	closed
	N/C		closed	open	open