Product datasheet





advanced touchscreen panel, Harmony GTO, 320 x 240pixels QVGA, 5.7inch TFT, 64MB

HMIGTO2300

Main

Range Of Product	Harmony GTO Advanced touchscreen panel				
Product Or Component Type					
Display Colour	65536 colours				
Display Size	5.7 inch				
Supply	External source				
Operating System	Harmony				
Battery Type	Lithium battery for internal RAM, autonomy: 100 days, charging time = 5 day(s), hattery life = 10 year(s)				

Complementary

o o in promontary						
Terminal Type	Touchscreen display					
Display Type	Backlit colour TFT LCD					
Display Resolution	320 x 240 pixels QVGA					
Touch Sensitive Zone	1024 x 1024					
Touch Panel	Resistive film, 1000000 cycles					
Backlight Lifespan	50000 hours white at 25 °C					
Brightness	16 levels - control by touch panel 16 levels - control by software					
Character Font	Chinese (simplified Chinese) Korean ASCII (European characters) Japanese (ANK, Kanji) Taiwanese (traditional Chinese)					
[Us] Rated Supply Voltage	24 V DC					
Supply Voltage Limits	19.228.8 V					
Inrush Current	30 A					
Maximum Power Consumption In W	6.5 W when power is not supplied to external devices 4.5 W when backlight is OFF 5 W when backlight is dimmed 10.5 W					
Local Signalling	Status LED green, steady for offline Status LED green, steady for operating Status LED orange, flashing for software starting up Status LED red, steady for power supply (ON) Status LED clear, faded for power supply (OFF) COM2 LED yellow, steady for data is being transmitted COM2 LED yellow, faded for no data transmission SD card LED green, steady for card is inserted SD card LED green, faded for card is not inserted or is not being accessed					
Software Designation	Vijeo Designer configuration software >= V6.1					

Life Is On Schneider 20 Apr 2024

	Flash EPROM, 64 MB			
Data Backed Up	128 kB internal RAM (SRAM)			
Downloadable Protocols	Schneider Electric Modicon Modbus Schneider Electric Modicon Uni-TE Schneider Electric Modicon Modbus Plus Schneider Electric Modicon FIPWAY Mitsubishi Melsec third party protocols Omron Sysmac third party protocols Rockwell Automation Allen-Bradley third party protocols Siemens Simatic third party protocols			
Integrated Connection Type	COM1 serial link SUB-D 9, interface: RS232C, transmission rate: 2400115200 bps COM2 serial link RJ45, interface: RS485, transmission rate: 2400115200 bps COM2 serial link RJ45, interface: RS485, transmission rate: 187.5 kbps compatible with Siemens MPI USB 2.0 type A USB 2.0 type mini B			
Product Mounting	Flush mounting			
Fixing Mode	By 4 screw clamps			
Front Material	PPT			
Enclosure Material	PPT			
Type Of Cooling	Natural convection			
Width	169.5 mm			
Height	137 mm			
Depth	59.5 mm			
Net Weight	0.8 kg			
Standards	IEC 61000-6-2 UL 508 IEC 61131-2			
Product Certifications	KCC CE cULus C-Tick UKCA UKEX			
Ambient Air Temperature For	050 °C			
Operation Ambient Air Temperature For Storage	-2060 °C			
Relative Humidity	1090 % without condensation			
Operating Altitude	< 2000 m			
p Degree Of Protection	IP20 (rear panel) conforming to IEC 60529 IP65 (front panel) conforming to IEC 60529			
Nema Degree Of Protection	NEMA 4X front panel (indoor use)			
	147 m/s² 3 chocks in each direction X, Y and Z conforming to IEC 61131-2			
Shock Resistance	3.5 mm (f = 59 Hz) - X, Y, Z directions for 10 cycles (approx. 100 min) - conforming to IEC 61131-2 1 gn (f = 9150 Hz) - X, Y, Z directions for 10 cycles (approx. 100 min) - conforming to IEC 61131-2			
Shock Resistance Vibration Resistance	1 gn (f = 9150 Hz) - X, Y, Z directions for 10 cycles (approx. 100 min) - conforming			

PCE

Unit Type Of Package 1

Number Of Units In Package 1	1
Package 1 Height	14.500 cm
Package 1 Width	18.500 cm
Package 1 Length	24.000 cm
Package 1 Weight	1.063 kg
Unit Type Of Package 2	S03
Number Of Units In Package 2	4
Package 2 Height	30.000 cm
Package 2 Width	30.000 cm
Package 2 Length	40.000 cm
Package 2 Weight	5.157 kg
Unit Type Of Package 3	P12
Number Of Units In Package 3	64
Package 3 Height	75.000 cm
Package 3 Width	80.000 cm
Package 3 Length	120.000 cm
Package 3 Weight	93.657 kg

Contractual warranty

Warranty 18 months

Sustainability Green Premium

Green PremiumTM **label** is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >





Transparency RoHS/REACh

Well-being performance



Mercury Free



Rohs Exemption Information

Yes


Certifications & Standards

Reach Regulation	REACh Declaration			
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope)			
China Rohs Regulation	China RoHS declaration			
Environmental Disclosure	Product Environmental Profile			
Weee	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins			
Circularity Profile	End of Life Information			

Dimensions Drawings

Dimensions


External Dimensions

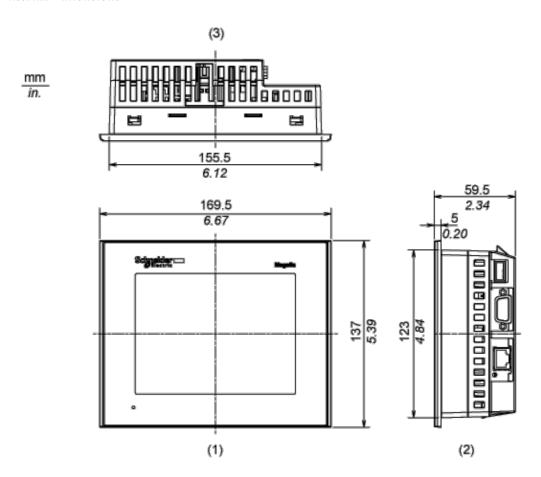

- 1 Front
- 2 Right Side
- 3 Тор

Installation with Installation Fasteners


HMIGTO2300

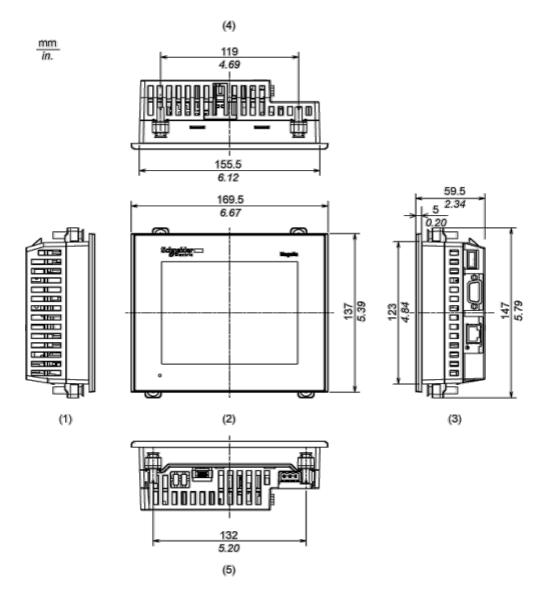

- 1 Left Side
- 2 Front
- 3 Right Side
- 4 Top
- 5 Bottom

Dimensions with Cables

HMIGTO2300

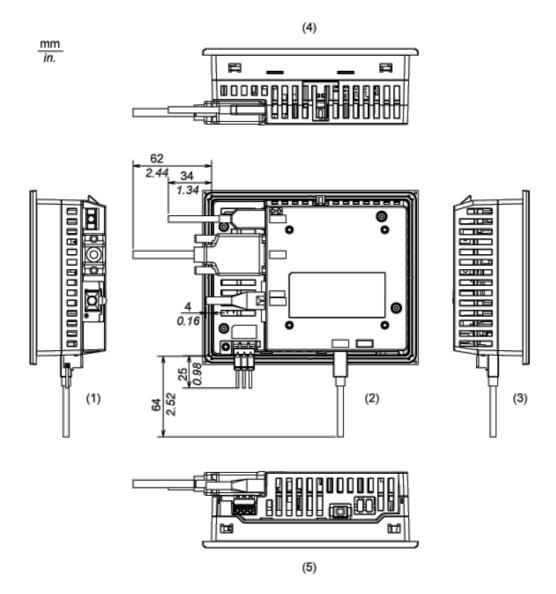


- 1 Left Side
- 2 Rear
- 3 Right Side
- 4 Top
- 5 Bottom

HMIGTO2300

Mounting and Clearance


Mounting

Panel Cut Dimensions

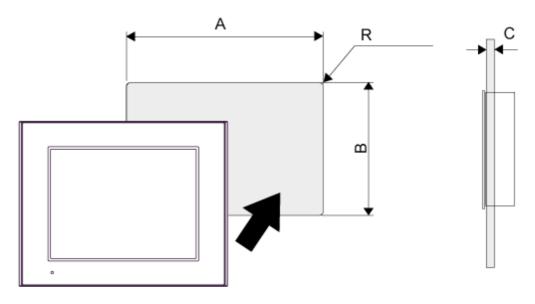


Α		В		С		R	
mm	in.	mm	in.	mm	in.	mm	in.
156 (+1, -0)	6.14 (+0.04, -0)	123.5 (+1, -0)	4.86 (+0.04, -0)	1.65	0.060.2	3 max.	0.12 max.

Installation Fastener Dimensions

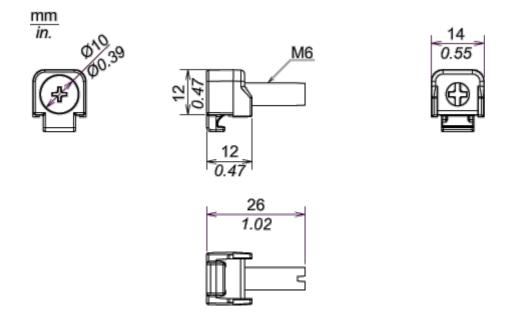

Installation Requirements

Mounting Angle



When installing the panel in a slanted position with an incline more than 30° , the ambient temperature must not exceed 40° C (104° F). You may need to use forced air cooling (fan,A/C) to ensure the ambient operating temperature is 40° C or less (104° F or less).

Clearance

