

Product data sheet

Specifications



basic analog input kit, Modicon STB, 0 to 10V, 2I, 10 bits

STBAVI1255K

Product availability: Non-Stock - Not normally stocked in distribution facility

Main

Range Of Product	Modicon STB distributed I/O solution
Product Or Component Type	Basic analog input kit
Kit Composition	STBAVI1255 module STBXTS2100, 6-terminal spring clamp connector STBXTS1100, 6-terminal screw type connector STBXBA1000 base
Analogue Input Type	Voltage 0...10 V
Analogue Input Number	2
Analogue Input Resolution	10 bits
Type Of Filter	Single low pass input filter 25 Hz

Complementary

Absolute Maximum Input	50 V DC
Response Time	5 ms
Cold Swapping	Yes
Hot Swapping Fallback	No for basic NIMs
Data Format	EN 61131-2 IEC 61131-2
Update Time	10 ms
Integral Linearity	+/- 0.2 %FS
Differential Linearity	Monotonic
Input Impedance	400 kOhm
Maximum Supply Current For Sensors	100 mA per input channels
Maximum Source Impedance	1 kOhm
Absolute Accuracy Error	+/- 0.5 % of full scale 25 °C
Temperature Drift	+/-0.01 %/°C
Insulation Between Channels And Logic Bus	1500 V for 1 minute
Insulation Between Channels And Sensor Bus	30 V
Addressing Requirement	2 input words
Product Compatibility	Mounting base STBXBA1000 Power distribution module STBPDT3100/3105
[Us] Rated Supply Voltage	24 V DC
Supply	Power distribution module

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Current Consumption	30 mA 5 V DC logic bus
Marking	CE
Overvoltage Category	II
Status Led	1 LED (Green) module status (RDY)
Net Weight	0.26 lb(US) (0.116 kg)

Environment

Product Certifications	FM Class 1 Division 2 ATEX Cat 3G UL CSA C-tick
Pollution Degree	2 IEC 60664-1
Operating Altitude	<= 6561.68 ft (2000 m)
Ip Degree Of Protection	IP20 conforming to IEC 61131-2 class 1
Ambient Air Temperature For Operation	32...140 °F (0...60 °C)
Ambient Air Temperature For Operation	32...140 °F without derating
Ambient Air Temperature For Storage	-40...185 °F (-40...85 °C) without derating
Ambient Air Temperature For Storage	-40...185 °F without derating
Relative Humidity	95 % 140 °F (60 °C) without condensation
Vibration Resistance	+/-0.35 mm 10...58 Hz 3 gn 58...150 Hz 35 x 7.5 mm symmetrical DIN rail 5 gn 58...150 Hz 35 x 15 mm symmetrical DIN rail
Shock Resistance	30 gn 11 ms IEC 88 reference 2-27

Ordering and shipping details

Category	US1PC3218215
Discount Schedule	PC32
Gtin	3595863948912
Returnability	No
Country Of Origin	ID

Packing Units

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	0.98 in (2.5 cm)
Package 1 Width	3.15 in (8.0 cm)
Package 1 Length	5.12 in (13.0 cm)
Package 1 Weight	4.76 oz (135.0 g)
Unit Type Of Package 2	S02
Number Of Units In Package 2	28
Package 2 Height	5.91 in (15.0 cm)
Package 2 Width	11.81 in (30.0 cm)
Package 2 Length	15.75 in (40.0 cm)

Package 2 Weight	9.66 lb(US) (4.38 kg)
Unit Type Of Package 3	PAL
Number Of Units In Package 3	448
Package 3 Height	23.62 in (60.0 cm)
Package 3 Width	31.50 in (80.0 cm)
Package 3 Length	176.38 in (448.0 cm)
Package 3 Weight	133.34 lb(US) (60.48 kg)

Contractual warranty

Warranty	18 months
----------	-----------

Sustainability

Green Premium™ label is Schneider Electric's commitment to delivering products with best-in-class environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

[Learn more about Green Premium >](#)


[Guide to assess a product's sustainability >](#)

Well-being performance

 Mercury Free	
 Rohs Exemption Information	Yes
Reach Regulation	REACH Declaration
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope)
China Rohs Regulation	China RoHS declaration
Weee	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.
California Proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

Dimensions Drawings

Dimensions

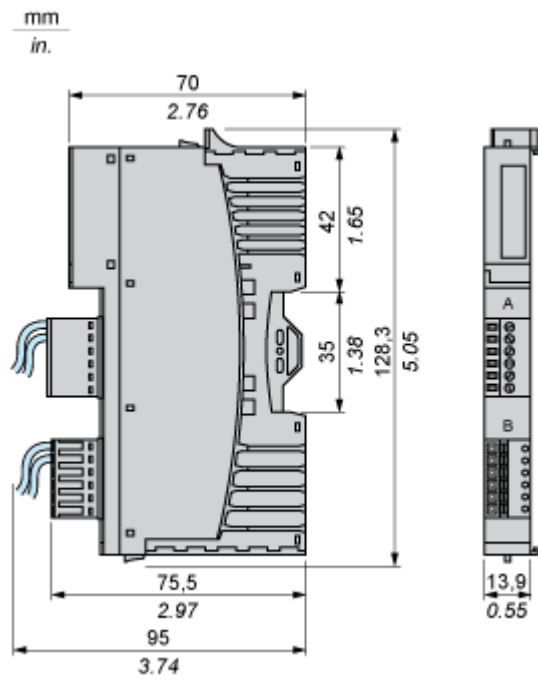


Connections and Schema


Wiring Diagrams

Examples

2 isolated analog sensors, external 24 VDC power supply

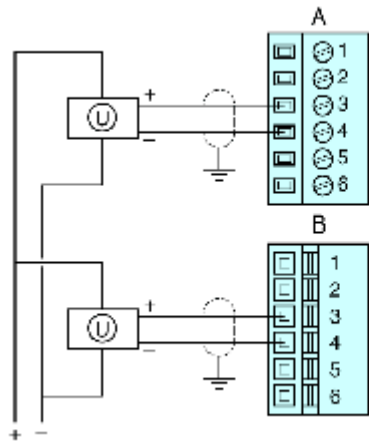

2 non-isolated analog sensors, 24 VDV supplied by the PDM

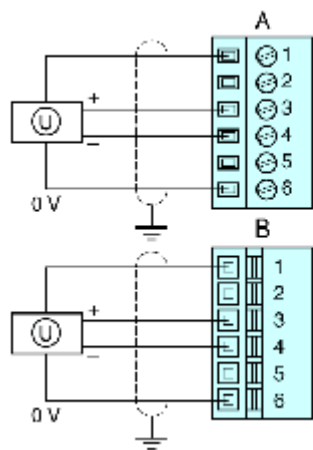

Pin	Top Connections	Bottom Connections
1	+24 VDC from field power bus for field device accessories	+24 VDC from field power bus for field device accessories
2	no connection	no connection
3	input from sensor 1	input from sensor 2
4	analog input return	analog input return
5	no connection	no connection
6	field power return (to the module)	field power return (to the module)